NIEWIADÓW



CATALOG OF TRAILERS

www.niewiadow.pl










GENERAL CATEGORIES

Page 5-12  Luggage trailers

Page 13-18  Heavy-duty trailers

Page 19-30  Car trailers

Page 31-43  Specialised trailers

Page 44-47  Motorcycle and ATV trailers

Page 48-50  Boat trailers

Page 51-53  Livestock trailers

Page 54-68  Fourgons and refrigerated trailers

Page 69-71  Commercial trailers

The information and technical data contained in the catalog are for information purposes only and do not constitute a commercial offer within the meaning of the law.
The manufacturer reserves the right to make changes and modifications to the data without prior notice and is not responsible for any printing errors. All materials and images in the catalog are for illustrative purposes only.

CONTENTS

NIEWIADÓW

About us **4**

Luggage trailers **5-12**

Hochlader 6
Majster 7
Bork 8
BO 9
BO ECO 10
BD 11
BEG 12

Heavy-duty trailers **13-18**

Alumina 14
Amazone, Phoenix, Condor 15
Atlas 16
Boss 17
Lenka 18

Car trailers **19-30**

Sonda 20
Mini Wenus Smart 21
Mini Wenus 22
Adam, Adam Alu 23
Adam Light 24
Jupiter SM, Jupiter Alu 25
Jupiter NM, 26
Saturn 27
Mars SM 28
Mars NM 29
Indiana ECO 30

Specialised trailers **31-43**

Trailers for transporting mini-excavators - K-series 32
Trailers for transporting mini-excavators – KN-series 34
Tipped trailers – KIPER 35
Tipped trailers – KPW-series 37
Trailers for transporting cables 38
Trailers for transporting power generators 39
Trailers for surveillance equipment 40
Long-load trailers 41
Monte Carlo 42
Sport Caravan 43

Motorcycle and ATV trailers **44-47**

BOP 45
Motorcycle trailers – B7320 46
Motorcycle trailers – MotoCamp 47

Boat trailers **48-50**

P-series 49


Livestock trailers **51-53**

Horse trailers 52
Livestock trailers 53


Fourgons and refrigerated trailers **54-68**

Fourgons - plywood 55
Fourgons FC - plywood (underfloor wheels) 59
Fourgons - sandwich 61
Fourgons FC - sandwich (underfloor wheels) 63
Fourgons - laminate 65
Refrigerated trailers 68

Commercial trailers **69-71**

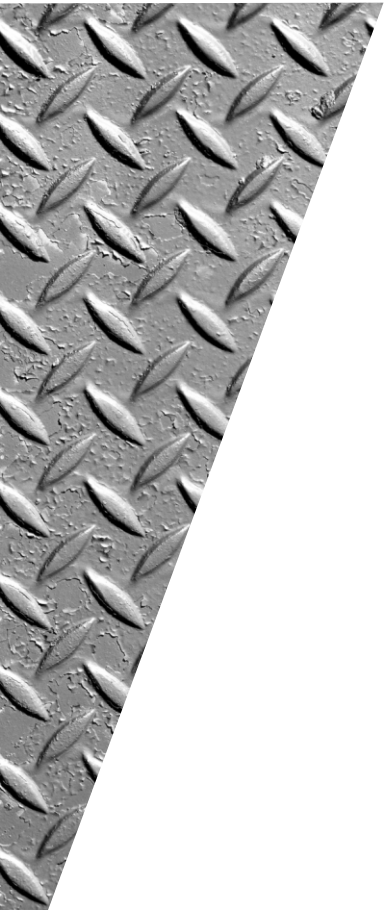



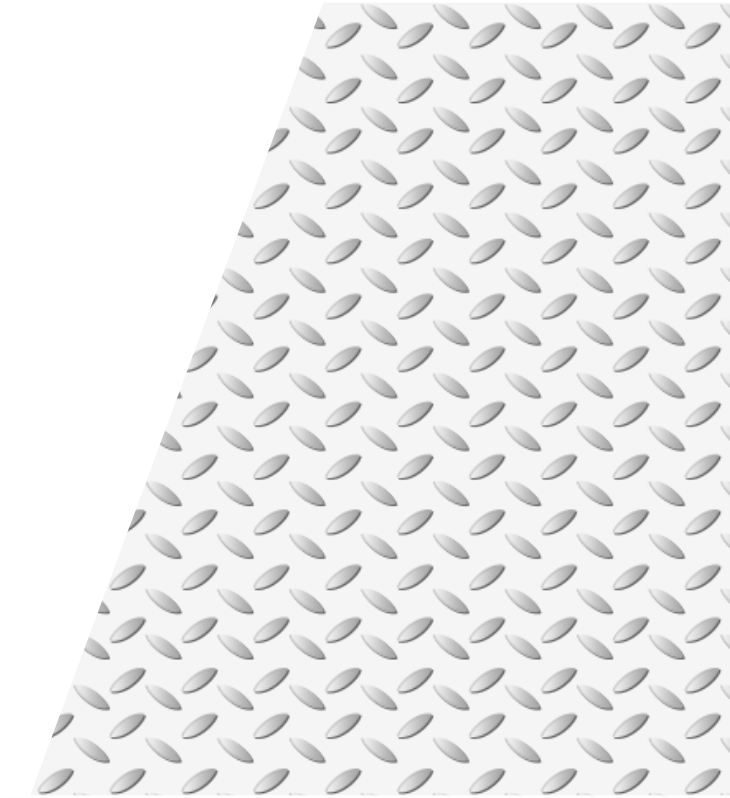

ABOUT US

Dear customers,
We are proud to present our latest catalog of trailers, which continues the nearly 60-year tradition of our company. For more than half a century we have been gaining the experience and trust of our customers by providing products that combine reliability, quality and safety, earning us the position of a national leader in the production of car trailers up to 3500 kg.

Our trailers are designed for a wide variety of purposes - from transporting cargo to recreation. Every day, we strive to ensure that fully safe and functional products come off the production line, making our customers' everyday challenges easier.

In the catalog, you will find technical data and information to help you choose the best variant to suit your individual needs. We would like to thank you for your trust and invite you to join the ranks of our satisfied customers.







NIEWIADOW



LUGGAGE TRAILERS

PAGES 5 - 12







HOCHLADER



BH7530.15T



393 - 462 cm

TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
BH7525.12U	750	510	240	250x125x39	393x138x105	1 axle (unbraked)	165/70 R13
BH7525.12T	750	470	280	250x125x39	393x138x105	2 axles (unbraked)	165/70 R13
BH7525.15U	750	490	260	250x150x39	393x163x105	1 axle (unbraked)	165/70 R13
BH7525.15T	750	450	300	250x150x39	393x163x105	2 axles (unbraked)	165/70 R13
BH7530.15U	750	470	280	300x150x39	443x163x105	1 axle (unbraked)	165/70 R13
BH7530.15T	750	430	320	300x150x39	443x163x105	2 axles (unbraked)	165/70 R13
BH7530.20U	750	430	320	300x200x39	443x213x105	1 axle (unbraked)	165/70 R13
BH7530.20T	750	390	360	300x200x39	443x213x105	2 axles (unbraked)	165/70 R13
BH7525.15H-750	750	445	305	250x150x39	412x163x105	1 axle (braked)	165/70 R13
BH7525.15H-1300	1300	985	315	250x150x39	412x163x105	1 axle (braked)	165 R13C
BH7525.15HT-1500	1500	1155	345	250x150x39	412x163x105	2 axles (braked)	165/70 R13
BH7530.15H-750	750	400	350	300x150x39	462x163x105	1 axle (braked)	165/70 R13
BH7530.15H-1300	1300	940	360	300x150x39	462x163x105	1 axle (braked)	165 R13C
BH7530.15HT-1500	1500	1110	390	300x150x39	462x163x105	2 axles (braked)	165/70 R13
BH7530.15HT-2700	2700	2280	420	300x150x39	462x163x105	2 axles (braked)	165 R13C
BH7530.20H-1300	1300	925	375	300x200x39	462x213x105	1 axle (braked)	165 R13C
BH7530.20HT-1500	1500	1095	405	300x200x39	462x213x105	2 axles (braked)	165/70 R13
BH7530.20HT-2700	2700	2265	435	300x200x39	462x213x105	2 axles (braked)	165 R13C

STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers (only braked models)
Steel sides - openable and removable
Tiltable box (single-axle models)
Anti-slip plywood floor
Lashing points
Removable posts
Plastic mudguards

ADDITIONAL OPTIONS:

Flat tarpaulin
Tarpaulin with a frame h=160 cm
Additional side extension h=40 cm
Additional mesh extension h=40 cm
Spare wheel
Spare wheel holder



BC7530T



TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
BC7520U	750	570	180	200x125x44	324x171x94	1 axle (unbraked)	155/70 R13
BC7523U II	750	550	200	233x132x44	357x178x94	1 axle (unbraked)	155/70 R13
BC7523T II	750	500	250	233x132x44	357x178x94	2 axles (unbraked)	155/70 R13
BC7525U II	750	535	215	250x132x44	374x178x94	1 axle (unbraked)	155/70 R13
BC7525T II	750	495	255	250x132x44	374x178x94	2 axles (unbraked)	155/70 R13
BC7530U	750	475	275	300x150x44	424x196x94	1 axle (unbraked)	155/70 R13
BC7530T	750	440	310	300x150x44	424x196x94	2 axles (unbraked)	155/70 R13
BC7520UH	750	550	200	200x125x44	343x171x94	1 axle (braked)	165/70 R13
BC7523UH II	750	505	245	233x132x44	376x178x94	1 axle (braked)	165/70 R13
BC7525UH II	750	490	260	250x132x44	393x178x94	1 axle (braked)	165/70 R13
BC7530UH	750	450	300	300x150x44	443x196x94	1 axle (braked)	165/70 R13
BC7530UH-1300	1300	990	310	300x150x44	443x196x94	1 axle (braked)	165 R13C
BC7530HT-1500	1500	1150	350	300x150x44	443x196x94	2 axles (braked)	165/70 R13
BC7530HT-2700	2700	2320	380	300x150x44	443x196x94	2 axles (braked)	165 R13C

STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers (only braked models)
Tiltable box (single-axle models)
Steel sides - openable front and rear
Fixed railing
Anti-slip plywood floor
Lashing points
Steel mudguards
Mud flaps

ADDITIONAL OPTIONS:

Flat tarpaulin
Tarpaulin with a frame h=120 cm/h=150 cm
Additional mesh extension
Spare wheel
Spare wheel holder
Back ramp (instead of rear side)

BORK



BK725UD II



TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
BK7520UD	750	560	190	205x125x44	324x171x94	1 axle (unbraked)	155/70 R13
BK7523UD II	750	535	215	225x132x44	357x178x94	1 axle (unbraked)	155/70 R13
BK7523TD II	750	485	265	225x132x44	357x178x94	2 axles (unbraked)	155/70 R13
BK7525UD II	750	520	230	252x132x44	374x178x94	1 axle (unbraked)	155/70 R13
BK7525TD II	750	470	280	252x132x44	374x178x94	2 axles (unbraked)	155/70 R13
BK7530UD	750	450	300	300x150x44	424x196x94	1 axle (unbraked)	155/70 R13
BK7530TD	750	430	320	300x150x44	424x196x94	2 axles (unbraked)	155/70 R13
BK7520UHD	750	535	215	205x125x44	343x171x94	1 axle (braked)	165/70 R13
BK7523UHD II	750	515	235	225x132x44	376x178x94	1 axle (braked)	165/70 R13
BK7525UHD II	750	495	255	252x132x44	393x178x94	1 axle (braked)	165/70 R13
BK7530UHD	750	460	290	300x150x44	443x196x94	1 axle (braked)	165/70 R13
BK7530UHD-1300	1300	1000	300	300x150x44	443x196x94	1 axle (braked)	165 R13C
BK7530HTD-1500	1500	1160	340	300x150x44	443x196x94	2 axles (braked)	165 R13C
BK7530HTD-2700	2700	2330	370	300x150x44	443x196x94	2 axles (braked)	165 R13C

STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers (only braked models)
Tiltable box (single-axle models)
Plywood sides - openable front and rear
Fixed railing
Anti-slip plywood floor
Lashing points
Steel mudguards
Mud flaps

ADDITIONAL OPTIONS:

Flat tarpaulin
Tarpaulin with a frame h=120 cm/h=150 cm
Additional mesh extension
Spare wheel
Spare wheel holder
Back ramp (instead of rear side)





BO7265U

TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
BO715U	750	625	125	150x100x39	270x171x88	1 axle (unbraked)	155/70 R13
BO717U	750	605	145	170x125x39	290x171x88	1 axle (unbraked)	155/70 R13
BO720U	750	590	160	205x125x39	324x171x88	1 axle (unbraked)	155/70 R13
BO723U II	750	570	180	233x132x39	357x178x88	1 axle (unbraked)	155/70 R13
BO723T II	750	520	230	233x132x39	357x178x88	2 axles (unbraked)	155/70 R13
BO725U	750	565	185	244x132x39	374x178x88	1 axle (unbraked)	155/70 R13
BO725T	750	515	235	244x132x39	374x178x88	2 axles (unbraked)	155/70 R13
BO7265U	750	555	195	265x125x39	395x171x88	1 axle (unbraked)	155/70 R13
BO7265T	750	505	245	265x125x39	395x171x88	2 axles (unbraked)	155/70 R13
BO7270U	750	550	200	270x125x39	400x171x88	1 axle (unbraked)	155/70 R13
BO7270T	750	500	250	270x125x39	400x171x88	2 axles (unbraked)	155/70 R13
BO730U	750	535	215	294x144x39	424x196x88	1 axle (unbraked)	155/70 R13
BO730T	750	485	265	294x144x39	424x196x88	2 axles (unbraked)	155/70 R13
BO720H-750	750	565	185	205x125x39	343x171x88	1 axle (braked)	165/70 R13
BO723H-750 II	750	550	200	233x132x39	376x171x88	1 axle (braked)	165/70 R13
BO725H-750	750	515	235	244x132x39	393x171x88	1 axle (braked)	165/70 R13
BO730H-750	750	470	280	294x144x39	443x196x88	1 axle (braked)	165/70 R13
BO730H-1300	1300	1010	290	294x144x39	443x196x88	1 axle (braked)	165 R13C
BO730HT-1500	1500	1170	330	294x144x39	443x196x88	2 axles (braked)	165/70 R13

STANDARD EQUIPMENT:

- Jockey wheel
- Shock absorbers (only braked models)
- Tiltable box (single-axle models)
- Steel sides - openable front and rear
- All sides removable
- Anti-slip plywood floor
- Lashing points
- Steel mudguards
- Mud flaps

ADDITIONAL OPTIONS:

- Flat tarpaulin
- Tarpaulin with a frame h=120 cm/h=150 cm
- Additional side extension
- Additional mesh extension
- Spare wheel
- Polyester cover (BO715-723 models)



BO7202 II WB ECO





TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
BO7202 ECO	750	640	110	205x110x27	309x156x74	1 axle (unbraked)	155/70 R13
BO7202 WB ECO	750	635	115	205x110x39	309x156x86	1 axle (unbraked)	155/70 R13
BO7202 II ECO	750	625	125	205x122x27	309x168x74	1 axle (unbraked)	155/70 R13
BO7202 II WB ECO	750	620	130	205x122x39	309x168x86	1 axle (unbraked)	155/70 R13

STANDARD EQUIPMENT:

Jockey wheel
Steel sides - openable rear
Anti-slip plywood floor
Conjoined drawbar and frame
Plastic mudguards

ADDITIONAL OPTIONS:

Flat tarpaulin
Tarpaulin with a frame h=100 cm
Additional side extension
Additional mesh extension
Spare wheel



BD7530YU



457 - 470 cm



STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers (only braked models or models with leaf springs)
Tiltable box (single-axle models)
Steel sides - openable front and rear
All sides removable
Anti-slip plywood floor
Lashing points
Steel mudguards
Mud flaps

ADDITIONAL OPTIONS:

Flat tarpaulin
Tarpaulin with a frame h=80 cm/h=120 cm
Additional side extension
Additional mesh extension
Spare wheel
Spare wheel holder

TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
BD7530U	750	515	235	304x150x35	457x205x88	1 axle (unbraked)	165/70 R13
BD7530T	750	450	300	304x150x35	457x205x88	2 axles (unbraked)	165/70 R13
BD7530YU*	750	510	240	304x150x35	457x205x88	1 axle (unbraked)	165/70 R13
BD7530H	750	495	255	304x150x35	470x205x88	1 axle (braked)	165/70 R13
BD7530H-1000	1000	745	255	304x150x35	470x205x88	1 axle (braked)	185/70 R13

*Y–trailers are equipped with leaf springs and shock absorbers

BEG



BEG7523YU





STANDARD EQUIPMENT:

- Jockey wheel
- Shock absorbers (only braked models)
- Tiltable box (single-axle models)
- Steel sides - openable front and rear
- All sides removable
- Anti-slip plywood floor
- Lashing points
- Steel mudguards
- Mud flaps

TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
BEG7520U	750	600	150	205x126x35	314x178x92	1 axle (unbraked)	165/70 R13
BEG7520YU	750	595	155	205x126x35	314x178x92	1 axle (unbraked)	165/70 R13
BEG7523U	750	580	170	241x132x35	360x184x87	1 axle (unbraked)	165/70 R13
BEG7523YU	750	575	175	241x132x35	360x184x87	1 axle (unbraked)	165/70 R13
BEG7523T	750	525	225	241x132x35	360x184x87	2 axles (unbraked)	165/70 R13
BEG7527U	750	570	180	263x132x35	373x184x87	1 axle (unbraked)	165/70 R13
BEG7527YU	750	565	185	263x132x35	373x184x87	1 axle (unbraked)	165/70 R13
BEG7527T	750	540	210	263x132x35	373x184x87	2 axles (unbraked)	165/70 R13

ADDITIONAL OPTIONS:

- Flat tarpaulin
- Tarpaulin with a frame h=120 cm
- Additional side extension
- Additional mesh extension
- Spare wheel
- Spare wheel holder
- Polyester cover (BEG7527 model)

*Y–trailers are equipped with leaf springs and shock absorbers

NIEWIADÓW

HEAVY-DUTY TRAILERS

PAGES 13 – 18



ALUMINA



ALUMINA L2



ALUMINA M1



ALUMINA L2

392 - 443 cm

TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
ALUMINA M1	1300	1055	245	256x131x33	392x177x86	1 axle (braked)	165 R13C
ALUMINA L1	1300	1020	280	310x155x33	443x202x86	1 axle (braked)	165 R13C
ALUMINA L2	2700	2340	360	310x155x33	443x202x86	2 axles (braked)	165 R13C

STANDARD EQUIPMENT:

Jockey wheel
Aluminium frame
Hot-dip galvanised steel drawbar
Aluminium sides - openable front and rear
Anti-slip plywood floor
Lashing points
Plastic mudguards
Mud flaps

ADDITIONAL OPTIONS:

Flat tarpaulin
Tarpaulin with a frame h=180 cm
Additional side extension
Additional mesh extension
Spare wheel
Spare wheel holder

AMAZONE, PHOENIX, CONDOR



AMAZONE III





TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
AMAZONE I	1300	950	350	260x150x40	405x156x106	1 axle (braked)	195/50 R13C
AMAZONE II	1500	1140	360	260x150x40	405x156x106	1 axle (braked)	195/50 R13C
AMAZONE III	2700	2250	450	260x150x40	405x156x106	2 axles (braked)	195/50 R13C
PHOENIX I	1300	910	390	310x160x40	464x167x107	1 axle (braked)	195/50 R13C
PHOENIX II	1500	1090	410	310x160x40	464x167x107	1 axle (braked)	195/50 R13C
PHOENIX III	1500	1050	450	330x180x40	464x167x107	1 axle (braked)	195/50 R13C
CONDOR I	2700	2220	480	310x160x40	464x167x110	2 axles (braked)	195/50 R13C
CONDOR II	2700	2170	530	330x180x40	484x187x110	2 axles (braked)	195/50 R13C
CONDOR III	2700	2070	630	400x200x40	554x207x110	2 axles (braked)	195/50 R13C

STANDARD EQUIPMENT:

Jockey wheel
Aluminium sides - openable and removable
Anti-slip plywood floor
Lashing points
Steel/Plastic mudguards
Mud flaps

ADDITIONAL OPTIONS:

Additional side extension
Additional mesh extension
Spare wheel
Spare wheel holder
Tarpaulin with a frame h=180 cm
Steel drive-on rails 2,5 m (for Phoenix/Condor)

ATLAS



ATLAS 4.5
with removable railing (option)



TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
ATLAS 4.0	2700	2030	670	400x210	555x218x76	2 axles (braked)	195/50 R13C
ATLAS 4.0	3000	2300	700	400x210	558x218x76	2 axles (braked)	195/50 R13C
ATLAS 4.0	3500	2780	720	400x210	558x218x76	2 axles (braked)	195/50 R13C
ATLAS 4.5	2700	1980	720	450x210	605x218x76	2 axles (braked)	195/50 R13C
ATLAS 4.5	3000	2250	750	450x210	608x218x76	2 axles (braked)	195/50 R13C
ATLAS 4.5	3500	2730	770	450x210	608x218x76	2 axles (braked)	195/50 R13C
ATLAS 5.0	2700	1930	770	500x210	655x218x76	2 axles (braked)	195/50 R13C
ATLAS 5.0	3000	2200	800	500x210	658x218x76	2 axles (braked)	195/50 R13C
ATLAS 5.0	3500	2680	820	500x210	658x218x76	2 axles (braked)	195/50 R13C
ATLAS 5.5	2700	1880	820	550x210	705x218x76	2 axles (braked)	195/50 R13C
ATLAS 5.5	3000	2150	850	550x210	708x218x76	2 axles (braked)	195/50 R13C
ATLAS 5.5	3500	2630	870	550x210	708x218x76	2 axles (braked)	195/50 R13C
ATLAS 6.0	2700	1830	870	600x210	755x218x76	2 axles (braked)	195/50 R13C
ATLAS 6.0	3000	2100	900	600x210	758x218x76	2 axles (braked)	195/50 R13C
ATLAS 6.0	3500	2680	820	600x210	758x218x76	2 axles (braked)	195/50 R13C
ATLAS 6.5	2700	1780	920	650x210	805x218x76	2 axles (braked)	195/50 R13C
ATLAS 6.5	3000	2050	950	650x210	808x218x76	2 axles (braked)	195/50 R13C
ATLAS 6.5	3500	2530	970	650x210	808x218x76	2 axles (braked)	195/50 R13C
ATLAS 7.0	2700	1730	970	700x210	855x218x76	2 axles (braked)	195/50 R13C
ATLAS 7.0	3000	2000	1000	700x210	858x218x76	2 axles (braked)	195/50 R13C
ATLAS 7.0	3500	2480	1020	700x210	858x218x76	2 axles (braked)	195/50 R13C
ATLAS 8.0	2700	1630	1070	800x210	955x218x76	2 axles (braked)	195/50 R13C
ATLAS 8.0	3000	1900	1100	800x210	958x218x76	2 axles (braked)	195/50 R13C
ATLAS 8.0	3500	2380	1120	800x210	958x218x76	2 axles (braked)	195/50 R13C

STANDARD EQUIPMENT:

- Jockey wheel
- Shock absorbers
- Anti-slip plywood floor
- Lashing points
- Winch
- Steel drive-on rails 2,5 m
- Spare wheel
- Spare wheel holder
- Plastic mudguards
- Mud flaps
- Wheel chocks
- Removable railing

ADDITIONAL OPTIONS:

- Aluminium sides
- LED road lights
- Knott revolving supports
- Aluminium drive-on rails 2,5 m
- Tarpaulin with a frame h=200 cm
- Widening of the cargo area (2,20-2,50 m)



BOSS 5.0



556 - 959 cm



BOSS PLUS 6.0 3 axles

TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
BOSS 4.0	2700	2020	680	400x210x40	556x248x110	2 axles (braked)	195/50 R13C
BOSS 4.0	3000	2275	725	400x210x40	556x248x110	2 axles (braked)	195/50 R13C
BOSS 4.0	3500	2725	775	400x210x40	559x248x110	2 axles (braked)	195/50 R13C
BOSS 5.0	3500	2650	850	500x210x40	659x248x110	2 axles (braked)	195/50 R13C
BOSS PLUS 5.0	3500	2545	955	500x250x40	659x255x110	2 axles (braked)	195/50 R13C
BOSS 6.0	3500	2575	925	600x210x40	759x248x110	2 axles (braked)	195/50 R13C
BOSS PLUS 6.0	3500	2460	1040	600x250x40	759x255x110	2 axles (braked)	195/50 R13C
BOSS PLUS 6.0	3500	2430	1070	600x250x40	759x255x110	3 axles (braked)	195/50 R13C
BOSS 8.0	3500	2400	1100	800x210x40	959x248x110	2 axles (braked)	195/50 R13C
BOSS PLUS 8.0	3500	2280	1220	800x250x40	959x255x110	2 axles (braked)	195/50 R13C
BOSS PLUS 8.0	3500	2250	1250	800x250x40	959x255x110	3 axles (braked)	195/50 R13C

STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers
Aluminium sides
Anti-slip plywood floor
Lashing points
Spare wheel
Spare wheel holder
Plastic mudguards
Mud flaps
Wheel chocks

ADDITIONAL OPTIONS:

LED road lights
Knott revolving supports
Tarpaulin with a frame h=200 cm
Widening of the cargo area (2,20-2,50 m)

LENKA



LENKA 6.0 3 axles (option)
with tarpaulin and a frame h=200 (option)







TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
LENKA 5.0	3000	2030	970	500x210x40	666x212x110	2 axles (braked)	195/50 R13C
LENKA 5.0	3500	2480	1020	500x210x40	666x212x110	2 axles (braked)	195/50 R13C
LENKA 5.5	3000	1980	1020	550x210x40	716x212x110	2 axles (braked)	195/50 R13C
LENKA 5.5	3500	2430	1070	550x210x40	716x212x110	2 axles (braked)	195/50 R13C
LENKA 6.0	3000	1930	1070	600x210x40	766x212x110	2 axles (braked)	195/50 R13C
LENKA 6.0	3500	2380	1120	600x210x40	766x212x110	2 axles (braked)	195/50 R13C

STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers
Aluminium sides
Hydraulically tilting box
Anti-slip plywood floor
Lashing points
Steel drive-on rails 1,25 m
Spare wheel
Spare wheel holder
Plastic mudguards
Mud flaps
Wheel chocks

ADDITIONAL OPTIONS:

LED road lights
Third axle
Floor with filling
(sides made of perforated aluminium sheet, centre made of grooved aluminium sheet)
Aluminium drive-on rails 2,0 m/2,5 m
Aluminium back ramp h=100 cm
Tarpaulin with a frame h=200 cm
Widening of the cargo area (2,20-2,50 m)

NIEWIADÓW

CAR TRAILERS

PAGES 19 – 30



SONDA







STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers
Steel sides (Cargo model)
Steel drive-on rails 1,20 m
Plastic/steel mudguards
Mud flaps
Wheel chocks

TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
SONDA I	1500	1110	390	350x195	506x210x100	1 axle (braked)	195/55 R10C
SONDA I Trike	1500	1100	400	350x195	506x210x100	1 axle (braked)	195/55 R10C
SONDA II	2500	1960	540	400x195	555x210x100	2 axles (braked)	195/55 R10C
SONDA II Cargo	2500	1830	670	400x205x40	555x206x100	2 axles (braked)	195/55 R10C
SONDA II Wood	2500	1890	610	400x200	555x206x100	2 axles (braked)	195/55 R10C

ADDITIONAL OPTIONS:

Spare wheel
Spare wheel holder
Winch with a base

MINI **WENUS SMART**



MW SMART-750H





STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers
Plastic/steel mudguards
Mud flaps
Wheel chocks

ADDITIONAL OPTIONS:

Spare wheel
Spare wheel holder
Winch with a base

TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
MW SMART-750H	750	490	260	260x175	444x222x60	1 axle (braked)	165R13C
MW SMART-1300H	1300	1030	270	260x175	444x222x63	1 axle (braked)	165R13C

MINI **WENUS**







TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
MINI WENUS-1300	1300	895	405	365x180	559x231x63	1 axle (braked)	195/50 R13C
MINI WENUS-1500	1500	1085	415	365x180	559x231x63	1 axle (braked)	195/50 R13C
MINI WENUS-1800	1800	1375	425	365x180	559x231x63	1 axle (braked)	195/50 R13C


STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers
Plastic/steel mudguards
Mud flaps
Wheel chocks

ADDITIONAL OPTIONS:

Spare wheel
Spare wheel holder
Winch with a base

ADAM, ADAM ALU

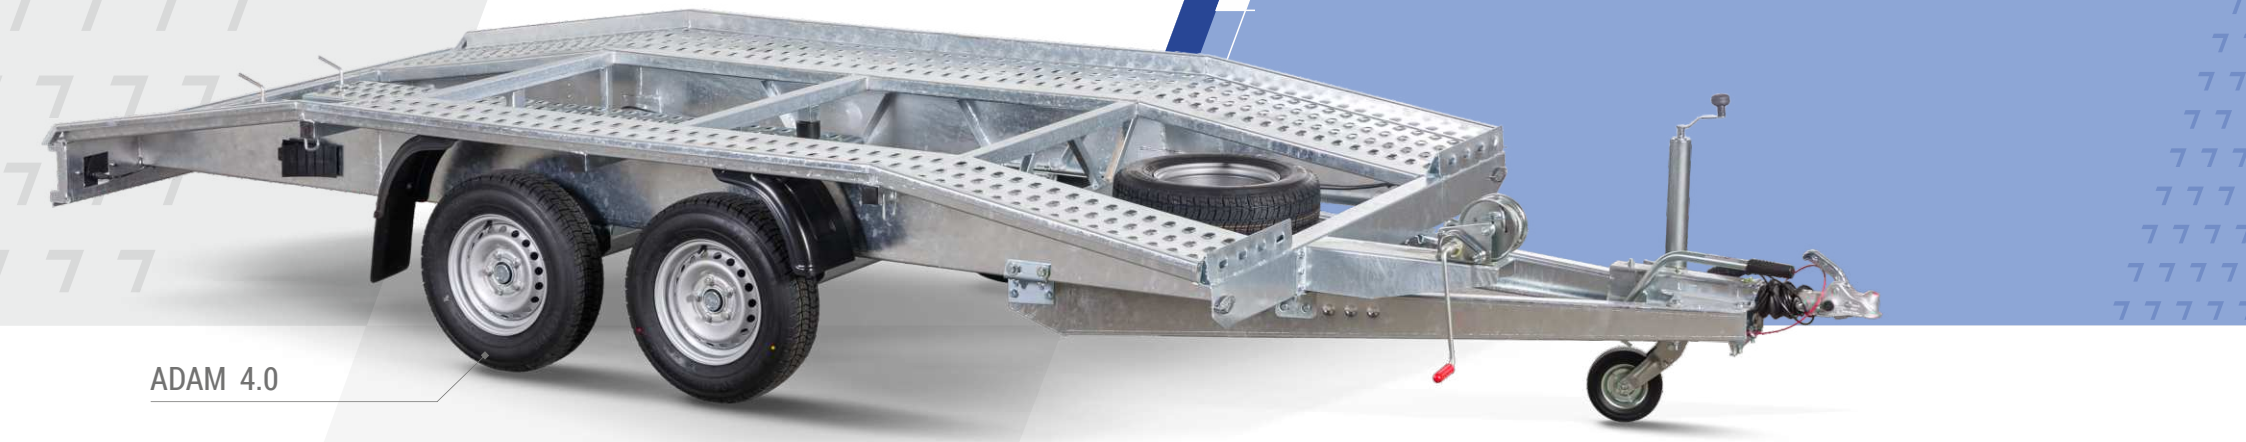

ADAM 4.0



TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
ADAM 4.0	2700	2120	580	400x210	556x218x74	2 axles (braked)	195/50 R13C
ADAM 4.0	3000	2390	610	400x210	556x218x74	2 axles (braked)	195/50 R13C
ADAM 4.0	3500	2870	630	400x210	556x218x74	2 axles (braked)	195/50 R13C
ADAM 4.5	2700	2090	610	450x210	606x218x74	2 axles (braked)	195/50 R13C
ADAM 4.5	3000	2360	640	450x210	606x218x74	2 axles (braked)	195/50 R13C
ADAM 4.5	3500	2840	660	450x210	606x218x74	2 axles (braked)	195/50 R13C
ADAM 5.0	2700	2060	640	500x210	656x218x74	2 axles (braked)	195/50 R13C
ADAM 5.0	3000	2330	670	500x210	656x218x74	2 axles (braked)	195/50 R13C
ADAM 5.0	3500	2810	690	500x210	656x218x74	2 axles (braked)	195/50 R13C
ADAM ALU*							
ADAM ALU 4.0	2700	2200	500	400x210	550x218x74	2 axles (braked)	195/50 R13C
ADAM ALU 4.5	2700	2170	530	450x210	600x218x74	2 axles (braked)	195/50 R13C

*aluminium frame and aluminium drive-on rails 2,0 m

STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers
Winch
Steel drive-on rails 2,0 m
Spare wheel
Spare wheel holder
Plastic/steel mudguards
Mud flaps
Wheel chocks

ADDITIONAL OPTIONS:


Plywood centre
Aluminium sheet centre
LED road lights
Aluminium drive-on rails 2,0 m/2,5 m
Steel drive-on rails 2,5 m

ADAM LIGHT



ADAM LIGHT 4.0



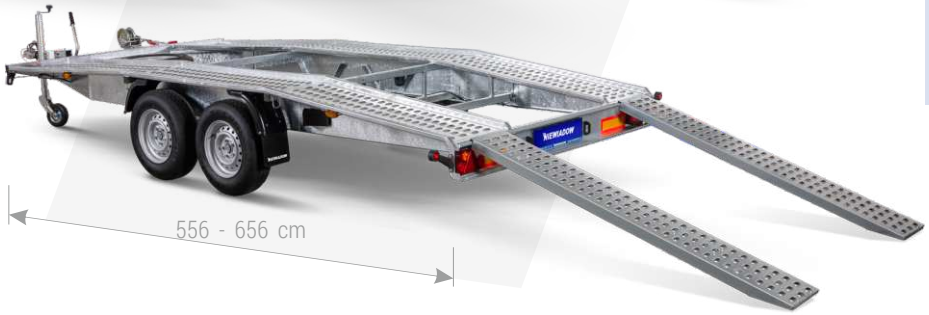

TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
ADAM Light 4.0	2700	2150	550	400x210	556x218x74	2 axles (braked)	195/50 R13C
ADAM Light 4.0	3000	2420	580	400x210	556x218x74	2 axles (braked)	195/50 R13C
ADAM Light 4.0	3500	2900	600	400x210	556x218x74	2 axles (braked)	195/50 R13C
ADAM Light 4.5	2700	2120	580	450x210	606x218x74	2 axles (braked)	195/50 R13C
ADAM Light 4.5	3000	2390	610	450x210	606x218x74	2 axles (braked)	195/50 R13C
ADAM Light 4.5	3500	2870	630	450x210	606x218x74	2 axles (braked)	195/50 R13C
ADAM Light 5.0	2700	2090	610	500x210	656x218x74	2 axles (braked)	195/50 R13C
ADAM Light 5.0	3000	2360	640	500x210	656x218x74	2 axles (braked)	195/50 R13C
ADAM Light 5.0	3500	2840	660	500x210	656x218x74	2 axles (braked)	195/50 R13C

STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers
Conjoined drawbar and frame
Winch
Steel drive-on rails 2,0 m
Spare wheel
Spare wheel holder
Plastic/steel mudguards
Mud flaps
Wheel chocks

ADDITIONAL OPTIONS:

LED road lights
Aluminium drive-on rails 2,0 m/2,5 m
Steel drive-on rails 2,5 m

JUPITER SM, JUPITER ALU



JUPITER SM 5.0



PARAMETRY TECHNICZNE:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
JUPITER SM 4.0	2700	2120	580	400x210	556x218x83	2 axles (braked)	195/50 R13C
JUPITER SM 4.0	3000	2390	610	400x210	556x218x83	2 axles (braked)	195/50 R13C
JUPITER SM 4.0	3500	2870	630	400x210	556x218x83	2 axles (braked)	195/50 R13C
JUPITER SM 4.5	2700	2090	610	450x210	606x218x83	2 axles (braked)	195/50 R13C
JUPITER SM 4.5	3000	2360	640	450x210	606x218x83	2 axles (braked)	195/50 R13C
JUPITER SM 4.5	3500	2840	660	450x210	606x218x83	2 axles (braked)	195/50 R13C
JUPITER SM 5.0	2700	2060	640	500x210	656x218x83	2 axles (braked)	195/50 R13C
JUPITER SM 5.0	3000	2330	670	500x210	656x218x83	2 axles (braked)	195/50 R13C
JUPITER SM 5.0	3500	2810	690	500x210	656x218x83	2 axles (braked)	195/50 R13C
JUPITER ALU*							
JUPITER ALU 4.0	2700	2180	520	400x210	551x218x76	2 axles (braked)	195/50 R13C
JUPITER ALU 4.5	2700	2150	550	450x210	601x218x76	2 axles (braked)	195/50 R13C

*aluminium frame and aluminium drive-on rails 2,0 m

STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers
Winch
Steel drive-on rails 2,0 m
Spare wheel
Spare wheel holder
Plastic/steel mudguards
Mud flaps
Wheel chocks

ADDITIONAL OPTIONS:

Plywood centre
Aluminium sheet centre
LED road lights
Aluminium drive-on rails 2,0 m/2,5 m
Steel drive-on rails 2,5 m
Knott revolving supports
Widening of the cargo area (2,20-2,50 m)

JUPITER NM





JUPITER NM 6.0 3 axles
with red side profile and aluminium sheet centre (option)



TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
JUPITER NM 4.0	2700	2100	600	400x210	556x218x76	2 axles (braked)	195/50 R13C
JUPITER NM 4.0	3000	2370	630	400x210	556x218x76	2 axles (braked)	195/50 R13C
JUPITER NM 4.0	3500	2850	650	400x210	556x218x76	2 axles (braked)	195/50 R13C
JUPITER NM 4.5	2700	2070	630	450x210	606x218x76	2 axles (braked)	195/50 R13C
JUPITER NM 4.5	3000	2340	660	450x210	606x218x76	2 axles (braked)	195/50 R13C
JUPITER NM 4.5	3500	2820	680	450x210	606x218x76	2 axles (braked)	195/50 R13C
JUPITER NM 5.0	2700	2040	660	500x210	656x218x76	2 axles (braked)	195/50 R13C
JUPITER NM 5.0	3000	2310	690	500x210	656x218x76	2 axles (braked)	195/50 R13C
JUPITER NM 5.0	3500	2790	710	500x210	656x218x76	2 axles (braked)	195/50 R13C
JUPITER NM 5.5	2700	2010	690	550x210	704x218x76	2 axles (braked)	195/50 R13C
JUPITER NM 5.5	3000	2280	720	550x210	704x218x76	2 axles (braked)	195/50 R13C
JUPITER NM 5.5	3500	2760	740	550x210	704x218x76	2 axles (braked)	195/50 R13C
JUPITER NM 5.5	3500	2720	780	550x210	704x218x76	3 axles (braked)	195/50 R13C
JUPITER NM 6.0	3500	2650	850	600x210	754x218x76	2 axles (braked)	195/50 R13C
JUPITER NM 6.0	3500	2610	890	600x210	754x218x76	3 axles (braked)	195/50 R13C
JUPITER NM 6.5	3500	2580	920	650x210	804x218x76	2 axles (braked)	195/50 R13C
JUPITER NM 6.5	3500	2540	960	650x210	804x218x76	3 axles (braked)	195/50 R13C

STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers
Winch
Steel drive-on rails 2,0 m
Spare wheel
Spare wheel holder
Plastic/steel mudguards
Mud flaps
Wheel chocks

ADDITIONAL OPTIONS:

Plywood centre
Aluminium sheet centre
LED road lights
Aluminium drive-on rails 2,0 m/2,5 m
Steel drive-on rails 2,5 m
Coloured side profile
(red, yellow, blue, white, black, orange)
Knott revolving supports

SATURN



SATURN 452127





TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
Saturn 452127	2700	1950	750	450x210	634x213x79	2 axles (braked)	195/55 R10C
Saturn 452130	3000	2220	780	450x210	634x213x79	2 axles (braked)	195/55 R10C
Saturn 452135	3500	2700	800	450x210	634x213x81	2 axles (braked)	195/50 R13C
Saturn 502127	2700	1910	790	500x210	684x213x79	2 axles (braked)	195/55 R10C
Saturn 502130	3000	2180	820	500x210	684x213x79	2 axles (braked)	195/55 R10C
Saturn 502135	3500	2660	840	500x210	684x213x81	2 axles (braked)	195/50 R13C
Saturn 552127	2700	1870	830	550x210	734x213x79	2 axles (braked)	195/55 R10C
Saturn 552130	3000	2140	860	550x210	734x213x79	2 axles (braked)	195/55 R10C
Saturn 552135	3500	2620	880	550x210	734x213x81	2 axles (braked)	195/50 R13C

STANDARD EQUIPMENT:

- Tiltable box
- Jockey wheel
- Shock absorbers
- Winch
- Spare wheel
- Spare wheel holder
- Plastic/steel mudguards
- Mud flaps
- Wheel chocks

ADDITIONAL OPTIONS:

- Plywood centre
- Aluminium sheet centre
- LED road lights

MARS SM



MARS SM 4.5





556 - 606 cm

STANDARD EQUIPMENT:

- Jockey wheel
- Shock absorbers
- Winch
- Steel drive-on rails 2,5 m
- Spare wheel
- Spare wheel holder
- Plastic/steel mudguards
- Mud flaps
- Wheel chocks

ADDITIONAL OPTIONS:

- Plywood centre
- Aluminium sheet centre
- LED road lights
- Aluminium drive-on rails 2,5 m
- Knott revolving supports
- Widening of the cargo area (2,20-2,50 m)

TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
MARS SM 4.0	2700	2070	630	400x210	556x218x76	2 axles (braked)	195/50 R13C
MARS SM 4.0	3000	2340	660	400x210	556x218x76	2 axles (braked)	195/50 R13C
MARS SM 4.0	3500	2820	680	400x210	556x218x76	2 axles (braked)	195/50 R13C
MARS SM 4.5	2700	2020	680	450x210	606x218x76	2 axles (braked)	195/50 R13C
MARS SM 4.5	3000	2290	710	450x210	606x218x76	2 axles (braked)	195/50 R13C
MARS SM 4.5	3500	2770	730	450x210	606x218x76	2 axles (braked)	195/50 R13C



MARS NM 4.5



MARS NM 6.0 3 axles
plywood centre (option)

TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
MARS NM 4.0	2700	2050	650	400x210	555x210x76	2 axles (braked)	195/50 R13C
MARS NM 4.0	3000	2320	680	400x210	558x210x76	2 axles (braked)	195/50 R13C
MARS NM 4.0	3500	2800	700	400x210	558x210x76	2 axles (braked)	195/50 R13C
MARS NM 4.5	2700	2000	700	450x210	605x210x76	2 axles (braked)	195/50 R13C
MARS NM 4.5	3000	2270	730	450x210	608x210x76	2 axles (braked)	195/50 R13C
MARS NM 4.5	3500	2750	750	450x210	608x210x76	2 axles (braked)	195/50 R13C
MARS NM 5.0	2700	1950	750	500x210	655x210x76	2 axles (braked)	195/50 R13C
MARS NM 5.0	3000	2220	780	500x210	658x210x76	2 axles (braked)	195/50 R13C
MARS NM 5.0	3500	2700	800	500x210	658x210x76	2 axles (braked)	195/50 R13C
MARS NM 5.5	2700	1900	800	550x210	705x210x76	2 axles (braked)	195/50 R13C
MARS NM 5.5	3000	2170	830	550x210	708x210x76	2 axles (braked)	195/50 R13C
MARS NM 5.5	3500	2650	850	550x210	708x210x76	2 axles (braked)	195/50 R13C
MARS NM 5.5	3500	2610	890	550x210	708x210x76	3 axles (braked)	195/50 R13C
MARS NM 6.0	2700	1850	850	600x210	755x210x76	2 axles (braked)	195/50 R13C
MARS NM 6.0	3000	2120	880	600x210	758x210x76	2 axles (braked)	195/50 R13C
MARS NM 6.0	3500	2600	900	600x210	758x210x76	2 axles (braked)	195/50 R13C
MARS NM 6.0	3500	2560	940	600x210	758x210x76	3 axles (braked)	195/50 R13C

STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers
Winch
Steel drive-on rails 2,5 m
Spare wheel
Spare wheel holder
Plastic/steel mudguards
Mud flaps
Wheel chocks


ADDITIONAL OPTIONS:

Plywood centre
Aluminium sheet centre
LED road lights
Aluminium drive-on rails 2,5 m
Knott revolving supports
Coloured side profile
(red, yellow, blue, white, black, orange)
Widening of the cargo area (2,20-2,50 m)

INDIANA ECO



INDIANA ECO 8.5

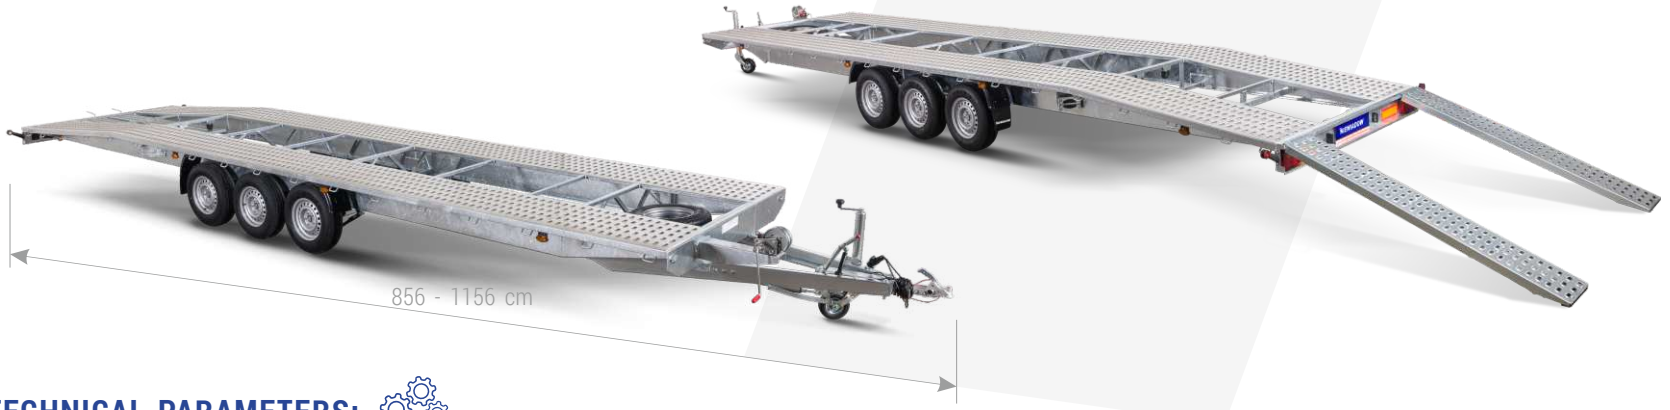

STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers
Winch
Steel drive-on rails 2,0 m
Spare wheel
Spare wheel holder
Plastic/steel mudguards
Mud flaps
Wheel chocks

ADDITIONAL OPTIONS:

Plywood centre
Aluminium sheet centre
LED road lights
Aluminium drive-on rails 2,0 m/2,5 m
Steel drive-on rails 2,5 m
Knott revolving supports
Widening of the cargo area (2,20-2,50 m)

TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
INDIANA ECO 7.0	3500	2580	920	700x210	856x212x93	3 axles (braked)	195/50 R13C
INDIANA ECO 8.0	3500	2540	960	800x210	956x212x93	3 axles (braked)	195/50 R13C
INDIANA ECO 8.5	3500	2500	1000	850x210	1006x212x93	3 axles (braked)	195/50 R13C
INDIANA ECO 9.0	3500	2460	1040	900x210	1056x212x93	3 axles (braked)	195/50 R13C
INDIANA ECO 9.5	3500	2420	1080	950x210	1106x212x93	3 axles (braked)	195/50 R13C
INDIANA ECO 10.0	3500	2380	1120	1000x210	1156x212x93	3 axles (braked)	195/50 R13C

NIEWIADÓW

SPECIALISED TRAILERS

PAGES 31 – 43





K3535 Drive-on rails



TECHNICAL PARAMETERS:

MODELS WITH TWO DRIVE-ON RAILS

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
K2527 drive-on rails	2700	2110	590	255x155x20	410x214x253	2 axles (braked)	185 R14C
K2530 drive-on rails	3000	2370	630	255x155x20	410x214x253	2 axles (braked)	185 R14C
K2535 drive-on rails	3500	2820	680	255x155x20	410x214x253	2 axles (braked)	185 R14C
K3027 drive-on rails	2700	2090	610	305x155x20	459x214x253	2 axles (braked)	185 R14C
K3030 drive-on rails	3000	2350	650	305x155x20	459x214x253	2 axles (braked)	185 R14C
K3035 drive-on rails	3500	2800	700	305x155x20	459x214x253	2 axles (braked)	185 R14C
K3527 drive-on rails	2700	1980	720	355x183x20	509x243x253	2 axles (braked)	185 R14C
K3530 drive-on rails	3000	2260	740	355x183x20	509x243x253	2 axles (braked)	185 R14C
K3535 drive-on rails	3500	2700	800	355x183x20	509x243x253	2 axles (braked)	185 R14C
K4027 drive-on rails	2700	1890	810	400x190x20	560x249x253	2 axles (braked)	185 R14C
K4030 drive-on rails	3000	2160	840	400x190x20	560x249x253	2 axles (braked)	185 R14C
K4035 drive-on rails	3500	2620	880	400x190x20	560x249x253	2 axles (braked)	185 R14C
K4035 drive-on rails–3 axles	3500	2600	900	400x190x20	560x249x253	3 axles (braked)	185 R14C
K4535 drive-on rails	3500	2530	970	450x190x20	610x249x253	2 axles (braked)	185 R14C
K4535 drive-on rails–3 axles	3500	2510	990	450x190x20	610x249x253	3 axles (braked)	185 R14C

STANDARD EQUIPMENT:

- Jockey wheel
- Shock absorbers
- Anti-slip plywood floor
- Lashing points
- Fixed supports
- Steel drive-on rails fastened vertically
- Spare wheel
- Spare wheel holder
- Steel mudguards
- Mud flaps
- Wheel chocks

ADDITIONAL OPTIONS:

Adjustable drawbar



K4035 Ramp 3 axles





TECHNICAL PARAMETERS: MODELS WITH RAMP

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
K2527 ramp	2700	2050	650	255x155x20	410x214x253	2 axles (braked)	185 R14C
K2530 ramp	3000	2310	690	255x155x20	410x214x253	2 axles (braked)	185 R14C
K2535 ramp	3500	2760	740	255x155x20	410x214x253	2 axles (braked)	185 R14C
K3027 ramp	2700	2030	670	305x155x20	459x214x253	2 axles (braked)	185 R14C
K3030 ramp	3000	2290	710	305x155x20	459x214x253	2 axles (braked)	185 R14C
K3035 ramp	3500	2740	760	305x155x20	459x214x253	2 axles (braked)	185 R14C
K3527 ramp	2700	1920	780	355x183x20	509x243x253	2 axles (braked)	185 R14C
K3530 ramp	3000	2200	800	355x183x20	509x243x253	2 axles (braked)	185 R14C
K3535 ramp	3500	2640	860	355x183x20	509x243x253	2 axles (braked)	185 R14C
K4027 ramp	2700	1830	870	400x190x20	560x249x253	2 axles (braked)	185 R14C
K4030 ramp	3000	2100	900	400x190x20	560x249x253	2 axles (braked)	185 R14C
K4035 ramp	3500	2560	940	400x190x20	560x249x253	2 axles (braked)	185 R14C
K4035 ramp–3 axles	3500	2540	960	400x190x20	560x249x253	3 axles (braked)	185 R14C
K4535 ramp	3500	2470	1030	450x190x20	610x249x253	2 axles (braked)	185 R14C
K4535 ramp–3 axles	3500	2450	1050	450x190x20	610x249x253	3 axles (braked)	185 R14C

STANDARD EQUIPMENT:

- Jockey wheel
- Shock absorbers
- Anti-slip plywood floor
- Lashing points
- Fixed supports
- Ramp
- Spare wheel
- Spare wheel holder
- Steel mudguards
- Mud flaps
- Wheel chocks

ADDITIONAL OPTIONS:

Adjustable drawbar



KN351635T 3 axles



TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
KN301527T	2700	2025	675	298x155x30	485x218x198	2 axles (braked)	185 R14C
KN301530T	3000	2290	710	298x155x30	485x218x198	2 axles (braked)	185 R14C
KN301535T	3500	2740	760	298x155x30	485x218x198	2 axles (braked)	185 R14C
KN351627T	2700	1950	750	348x165x30	535x228x198	2 axles (braked)	185 R14C
KN351630T	3000	2220	780	348x165x30	535x228x198	2 axles (braked)	185 R14C
KN351635T	3500	2640	860	348x165x30	535x228x198	2 axles (braked)	185 R14C
KN351635T–3 axles	3500	2620	880	348x165x30	535x228x198	3 axles (braked)	185 R14C
KN401835T	3500	2570	930	398x185x30	585x248x198	2 axles (braked)	185 R14C
KN401835T–3 axles	3500	2550	950	398x185x30	585x248x198	3 axles (braked)	185 R14C

STANDARD EQUIPMENT:

- Jockey wheel
- Shock absorbers
- Anti-slip plywood floor
- Lashing points
- Fixed supports
- Ramp
- Spare wheel
- Spare wheel holder
- Steel mudguards
- Mud flaps
- Wheel chocks

ADDITIONAL OPTIONS:

Adjustable drawbar

KIPER

S=STEEL SIDES
A=ALUMINIUM SIDES



KIPER 3018S1 RP
side reinforcement made of aluminium (option)





391 - 441 cm



STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers
Anti-slip plywood floor
Lashing points
S–steel sides
A–aluminium sides
Hand pump
Front side railing
Steel/plastic mudguards
Mud flaps
Wheel chocks

ADDITIONAL OPTIONS:

Steel drive-on rails (pockets for the drive-on rails in the frame)
Aluminium drive-on rails (pockets for the drive-on rails in the frame)
Additional mesh extension h=80 cm
Side reinforcement made of aluminium
Floor made of hot-dip galvanised sheet

TECHNICAL PARAMETERS: ONE WAY TIPPER (backwards) - HANDPUMP

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
KIPER 2615S1 RP	2700	2140	560	260x150x40	391x167x112	2 axles (braked)	195/50 R13C
KIPER 2615A1 RP	2700	2160	540	260x150x40	391x167x112	2 axles (braked)	195/50 R13C
KIPER 3015S1 RP	2700	2100	600	300x150x40	441x167x112	2 axles (braked)	195/50 R13C
KIPER 3015A1 RP	2700	2120	580	300x150x40	441x167x112	2 axles (braked)	195/50 R13C
KIPER 3018S1 RP	2700	2000	700	300x180x40	441x197x112	2 axles (braked)	195/50 R13C
KIPER 3018S1 RP	3500	2730	770	300x180x40	441x197x112	2 axles (braked)	195/50 R13C
KIPER 3018A1 RP	2700	2020	680	300x180x40	441x197x112	2 axles (braked)	195/50 R13C
KIPER 3018A1 RP	3500	2750	750	300x180x40	441x197x112	2 axles (braked)	195/50 R13C

TECHNICAL PARAMETERS: THREE-WAY TIPPER (backwards, to the left and to the right side) HAND PUMP

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
KIPER 3015S3 RP	2700	2010	690	300x150x40	441x167x112	2 axles (braked)	195/50 R13C
KIPER 3015A3 RP	2700	2030	670	300x150x40	441x167x112	2 axles (braked)	195/50 R13C
KIPER 3018S3 RP	2700	1910	790	300x180x40	441x197x112	2 axles (braked)	195/50 R13C
KIPER 3018S3 RP	3500	2640	860	300x180x40	441x197x112	2 axles (braked)	195/50 R13C
KIPER 3018A3 RP	2700	1930	770	300X180x40	441x197x112	2 axles (braked)	195/50 R13C
KIPER 3018A3 RP	3500	2660	840	300X180x40	441x197x112	2 axles (braked)	195/50 R13C



ELECTRIC PUMP

TECHNICAL PARAMETERS: ONE WAY TIPPER (backwards) ELECTRIC PUMP

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
KIPER 2615S1 EP	2700	2130	570	260x150x40	391x167x112	2 axles (braked)	195/50 R13C
KIPER 2615A1 EP	2700	2150	550	260x150x40	391x167x112	2 axles (braked)	195/50 R13C
KIPER 3015S1 EP	2700	2090	610	300x150x40	441x167x112	2 axles (braked)	195/50 R13C
KIPER 3015A1 EP	2700	2110	590	300x150x40	441x167x112	2 axles (braked)	195/50 R13C
KIPER 3018S1 EP	2700	1990	710	300x180x40	441x197x112	2 axles (braked)	195/50 R13C
KIPER 3018S1 EP	3500	2720	780	300x180x40	441x197x112	2 axles (braked)	195/50 R13C
KIPER 3018A1 EP	2700	2010	690	300X180x40	441x197x112	2 axles (braked)	195/50 R13C
KIPER 3018A1 EP	3500	2740	760	300X180x40	441x197x112	2 axles (braked)	195/50 R13C



HYDRAULIC CYLINDER

TECHNICAL PARAMETERS: THREE-WAY TIPPER (backwards, to the left and to the right side) ELECTRIC PUMP

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
KIPER 3015S3 EP	2700	2000	700	300x150x40	441x167x112	2 axles (braked)	195/50 R13C
KIPER 3015A3 EP	2700	2020	680	300x150x40	441x167x112	2 axles (braked)	195/50 R13C
KIPER 3018S3 EP	2700	1900	800	300x180x40	441x197x112	2 axles (braked)	195/50 R13C
KIPER 3018S3 EP	3500	2630	870	300x180x40	441x197x112	2 axles (braked)	195/50 R13C
KIPER 3018A3 EP	2700	1920	780	300X180x40	441x197x112	2 axles (braked)	195/50 R13C
KIPER 3018A3 EP	3500	2650	850	300X180x40	441x197x112	2 axles (braked)	195/50 R13C



FLOOR MADE OF HOT-DIP GALVANISED SHEET (OPTION)

RP - HAND PUMP
RPP - HAND PUMP + TWO DRIVE ON RAILS
EP - ELECTRIC PUMP
EPP - ELECTRIC PUMP + TWO DRIVE ON RAILS



KPW3530.18HT EP







TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
KPW3530.18HT RP	3500	2530	970	302x180x60	440x201x141	2 axles (braked)	185 R14C
KPW3530.18HT RPP	3500	2480	1020	302x180x60	440x201x141	2 axles (braked)	185 R14C
KPW3530.18HT EP	3500	2520	980	302x180x60	440x201x141	2 axles (braked)	185 R14C
KPW3530.18HT EPP	3500	2470	1030	302x180x60	440x201x141	2 axles (braked)	185 R14C

STANDARD EQUIPMENT:


Jockey wheel
Shock absorbers
Steel mudguards
Mud flaps
Wheel chocks
Split rear door
One way tipper – backwards

FOR TRANSPORTING **CABLES**



KB-30



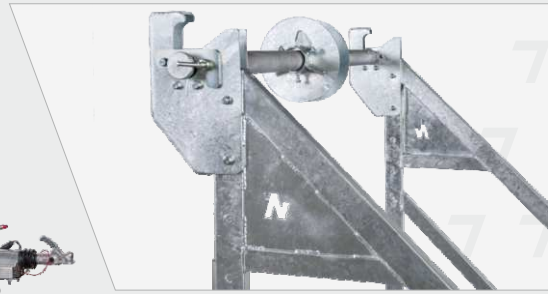



STANDARD EQUIPMENT:

- Jockey wheel
- Shock absorbers
- Winch
- Fixed supports
- Steel mudguards
- Mud flaps
- Wheel chocks

ADDITIONAL OPTIONS:

Spare wheel

TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
KB-27	2700	2100	600	Ø260	473x253x245	2 axles (braked)	185 R14C
KB-30	3000	2350	650	Ø260	473x253x245	2 axles (braked)	185 R14C
KB-35	3500	2800	700	Ø260	473x253x245	2 axles (braked)	185 R14C

FOR TRANSPORTING **POWER GENERATORS**



AG2726HT



TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
AG1326HT	1300	960	340	260x134	414x195x75	1 axle (braked)	185 R14C
AG2726HT	2700	2305	395	260x134	414x195x75	2 axles (braked)	185 R14C
AG2730HT	2700	2270	430	307x134	453x195x75	2 axles (braked)	185 R14C
AG3536HT	3500	3010	490	367x124	513x185x75	2 axles (braked)	185 R14C

STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers
Hot-dip galvanised steel mudguards
Mud flaps
Wheel chocks

ADDITIONAL OPTIONS:

Spare wheel

FOR **SURVEILLANCE EQUIPMENT**



FM7520



BM7512





STANDARD EQUIPMENT:


Jockey wheel
Adjustable supports
Mast for cameras
Anti-slip plywood floor
Wheel chocks
Steel/plastic mudguards
Mud flaps

Only for the FM7520 model:
Plywood walls 15 mm
Lashing points
Cargo securing profiles on the side walls

TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
BM7512	750	570	180	120x120	245x176x218	1 axle (unbraked)	155/70 R13
FM7520	750	390	360	200x100x150	386x161x218	1 axle (unbraked)	155/70 R13

LONG–LOAD **TRAILERS**

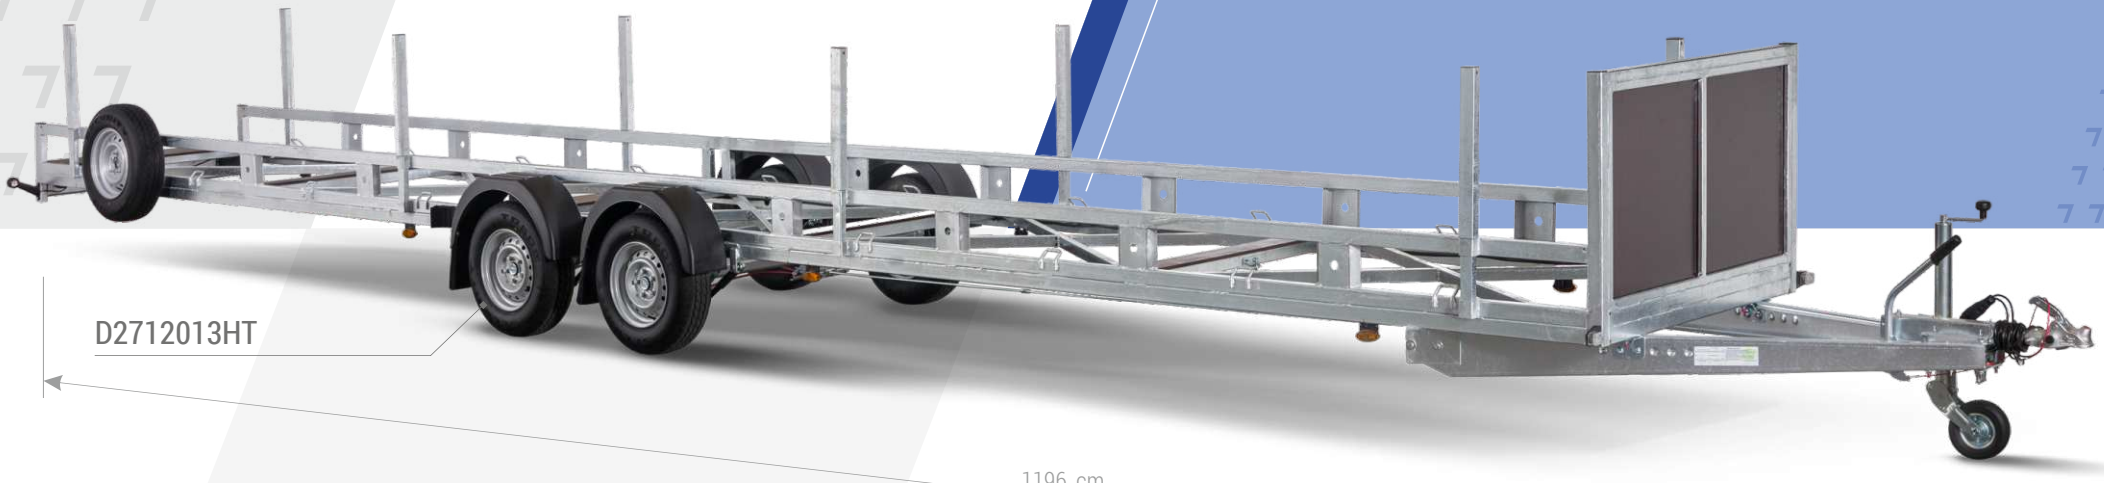



TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
D2712013HT	2700	1970	730	1050x131x22	1196x194x122	2 axles (braked)	185 R14C
D3512013HT	3500	2720	780	1050x131x22	1196x194x122	2 axles (braked)	185 R14C

STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers
Spare wheel
Spare wheel holder
Removable side supports
Plywood front wall
Lashing points
Steel/plastic mudguards
Mud flaps
Wheel chocks



Monte Carlo 6.0

aluminium sheet floor and alloy wheels (option)







STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers
Sandwich walls (33 mm)
Floor - perforated sheet metal on the sides and centre filled with plywood
Hydraulically tilting body
Ramp with additional drive-on rail
Aerodynamic slant
Side door on the right wall
Side hatch on the left wall
Steel/plastic mudguards
Wheel chocks

ADDITIONAL OPTIONS:

Third axle and increase of GVW to 3500 kg
Electric winch
Height change to 230 cm
Double doors on the side wall (instead of the hatch)
Aluminium sheet floor
Alloy wheels

TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
Monte Carlo 5.0	3000	1680	1320	500x220x200	703x237x264	2 axles (braked)	195/55 R10C
Monte Carlo 5.5	3000	1560	1440	550x220x200	753x237x264	2 axles (braked)	195/55 R10C
Monte Carlo 6.0	3000	1440	1560	600x220x200	803x237x264	2 axles (braked)	195/55 R10C













STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers
Sandwich walls (33 mm)
LED interior lighting
Steel/plastic mudguards
Wheel chocks, Fixed supports

In the garage area:
Anti-slip plywood floor, lashing points, cargo securing profiles on the side walls.

In the living area:
PCV floor, side door, electrical, gas and water installations, two windows (80x50 cm) with roller-blinds, USB socket, compressor refrigerator, gas cooker, sink, bed for two, wardrobe, kitchen furniture.

ADDITIONAL OPTIONS:

Bathroom (casette toilet,
shower with hot water installation, shower tray)
Side door to the garage area
Window in the garage area (120x60 cm)
Truma S3004 gas heating, Awning 4,5 m
Alloy wheels, Ball coupling with the AKS stabiliser
LED road lights

TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
SportCaravan	2700	1560	1140	500x200x190	654x250x244	2 axles (braked)	185 R14C

MOTORCYCLE AND ATV TRAILERS

PAGES 44 - 47





BOP730.17U



TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
BOP725U	750	580	170	248x132x14	364x190x137	1 axle (unbraked)	155/70 R13
BOP730.17U	750	470	280	297x172x14	414x230x137	1 axle (unbraked)	155/70 R13
BOP730.17T	750	420	330	297x172x14	414x230x137	2 axles (unbraked)	155/70 R13
BOP735.17U	750	450	300	347x172x14	464x230x137	1 axle (unbraked)	155/70 R13
BOP735.17T	750	395	355	347x172x14	464x230x137	2 axles (unbraked)	155/70 R13
BOP725UH	750	555	195	248x132x14	364x190x137	1 axle (braked)	155/70 R13
BOP730.17UH	750	450	300	297x172x14	414x230x137	1 axle (braked)	155/70 R13
BOP730.17H-1300	1300	990	310	297x172x14	414x230x137	1 axle (braked)	165 R13C
BOP730.17HT-1500	1500	1150	350	297x172x14	414x230x137	2 axles (braked)	155/70 R13
BOP735.17UH	750	420	330	347x172x14	483x230x137	1 axle (braked)	155/70 R13
BOP735.17H-1300	1300	960	340	347x172x14	483x230x137	1 axle (braked)	165 R13C
BOP735.17HT-1500	1500	1120	380	347x172x14	483x230x137	2 axles (braked)	155/70 R13

STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers (only braked models)
Anti-slip plywood floor
Fixed sides
Tiltable box (single-axle models)
Lashing points
Back ramp
Steel/plastic mudguards
Mud flaps

ADDITIONAL OPTIONS:

Additional mesh extension h=80 cm
Spare wheel
Spare wheel holder
Winch with base
Tarpaulin with a frame
h=120 cm/150 cm/180 cm

B7320



B7320M3



B7320M4 (QUAD)



B7320M1

STANDARD EQUIPMENT:

Jockey wheel
Lashing points
Steel/plastic mudguards
Mud flaps
For the M1, M2, M3 models:
Gutters/runners measuring 226x19 cm (M1 - 1 pc.; M2 - 2 pcs.; M3 - 3 pcs.)
Drive on rail
For the M4 model (QUAD):
Anti-slip plywood floor
Back ramp

ADDITIONAL OPTIONS:

Spare wheel

TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
B7320M1	750	607	143	207x125	317x173x90	1 axle (unbraked)	155/70 R13
B7320M2	750	590	160	207x125	317x173x90	1 axle (unbraked)	155/70 R13
B7320M3	750	574	176	207x125	317x173x90	1 axle (unbraked)	155/70 R13
B7320M4 (QUAD)	750	607	143	207x125	317x173x136	1 axle (unbraked)	155/70 R13

MOTOCAMP



HOLDER



TOOL BOX







STANDARD EQUIPMENT:

Jockey wheel
Aluminium sheet floor
Lashing points
Removable bike rack for two bicycles
Adjustable holder for the front wheel of a motorcycle
Aluminium drive-on rail
Tool box (41x33x35 cm)
Spare wheel, Spare wheel holder

TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
MotoCamp	750	515	235	200x100	282x207x175	1 axle (unbraked)	195/55 R10C

BOAT TRAILERS

PAGES 48 - 50



P400



P415



P750S



P751SBLACK



P752SBLACK



P935H



P1555H



P2065HT



P3585HT



TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
P400	450	330	120	400x160	440x160x120	1 axle (unbraked)	155/70 R13
P415	450	310	140	500x160	540x160x120	1 axle (unbraked)	155/70 R13
P750S	750	620	130	1x400x154	422x155x120	1 axle (unbraked)	155/70 R13
P751S BLACK	750	560	190	1x350x140	460x179x110	1 axle (unbraked)	155/70 R13
P752S BLACK	750	525	225	2x350x140	444x250x110	1 axle (unbraked)	165/70 R13
P752HS BLACK	1300	1050	250	2x350x140	444x250x110	1 axle (braked)	165/70 R13
P935H	900	675	225	400x180	514x177x120	1 axle (braked)	165/70 R13
P1555H	1500	1061	439	580x240	652x244x153	1 axle (braked)	185 R14C
P2065HT	2000	1542	458	680x250	758x209x140	2 axles (braked)	185/70 R13
P3585HT	3500	2716	784	955x240	955x241x153	2 axles (braked)	185 R14C

PRn



PRs



PRw



SR



S4R



PPn



PPw



PP300–PP750 „Skids”



S4P



SUPPORT TYPES AND THEIR VERTICAL ADJUSTMENT RANGE:

Symbol	Name	Vertical adjustment range
PRn	Low sliding roller support	15–20
PRs	Medium sliding roller support	20–30
PRw	High sliding roller support	30–50
SR	Screw-type roller support	20–50
S4R	Screw-type 4–roller support	20–50
PPn	Low sliding flat support	15–20
PPw	High sliding flat support	30–50
SP	Screw-type flat support	20–50
PP300	Sliding flat support L=1400	30–50
PP750	Sliding flat support L=1700	30–50
S4P	Screw-type 4–flat support	20–50

STANDARD EQUIPMENT:

Jockey wheel
Winch
Adjustable bow support
Steel/plastic mudguards
Mud flaps
Keel supports
Skids (for P750S, P751S-P752S Black, P935H)
S4R supports (for P1555, P2065HT, P3585HT models)
Tilting supports (for P1555, P2065HT, P3585HT models)

ADDITIONAL OPTIONS:

Spare wheel
Spare wheel holder
Supports to be selected according to the customer's preference

LIVESTOCK TRAILERS

PAGES 51 - 53



K2022HTC



K2022HTC ALU NM



K2022HTC NM











TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
K2022HTC SM	2000	1135	865	310x174x215	430x228x286	2 axles (braked)	185/70 R13
K2022HTC NM	2000	1115	885	310x174x230	430x228x300	2 axles (braked)	185/70 R13
K2022HTC ALU NM	2000	1100	900	310x174x230	430x228x300	2 axles (braked)	185/70 R13

STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers
Laminate roof and front wall
Floor and ramp covered with anti-slip rubber
Walls made of waterproof laminated plywood (SM and NM models)
Walls made of aluminium panels, anodised on both sides (ALU NM model)
Side door (120x60 cm)
Two adjustable side windows
Steel struts
Rear self-retractable tarpaulin
Internal wall protections
Upholstered interior bumpers
Horse separating dividers
Adjustment for smaller and larger horses with internal separation
Plastic mudguards

ADDITIONAL OPTIONS:

Manger with saddle box (two troughs, swivel saddle rack)
Divided ramp (opens like a door)
Ball coupling with the AKS stabiliser
Lacquered struts
Walls/roof colour different than white
Mesh/plywood head divider
Spare wheel, Spare wheel holder
Spare wheel cover



VT3543HT



VT1326H

TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
VT1326H	1300	750	550	258x140x148	425x190x215	1 axle (braked)	185 R14C
VT2730HT	2700	1860	840	300x160x186	450x215x245	2 axles (braked)	185 R14C
VT3530HT	3500	2640	860	300x160x186	450x215x245	2 axles (braked)	185 R14C
VT2736HT	2700	1760	940	360x177x186	540x235x245	2 axles (braked)	185 R14C
VT3536HT	3500	2460	1040	360x177x186	540x235x245	2 axles (braked)	185 R14C
VT2743HT	2700	1610	1090	430x177x186	610x235x245	2 axles (braked)	185 R14C
VT3043HT	3000	1910	1090	430x177x186	610x235x245	2 axles (braked)	185 R14C
VT3543HT	3500	2390	1110	430x177x186	610x235x245	2 axles (braked)	185 R14C

STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers
Galvanised sheet walls
Aluminium sheet floor
Floor of ramp covered with anti-slip rubber
Side barriers
Side service door
Fixed supports
Steel mudguards
Mud flaps
Wheel chocks

ADDITIONAL OPTIONS:

Spare wheel
Spare wheel holder
LED road lights
Animal separating divider

NIEWIADÓW

FOURGONS AND REFRIGERATED TRAILERS

PAGES 54 - 68



FOURGON – **PLYWOOD**

DOUBLE BACK DOOR



F2030HTD

STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers (only braked models)
Plywood walls 15 mm
Anti-slip plywood floor
Cargo securing profiles on the side walls
Lashing points
Fixed supports
Double back door
Steel/plastic mudguards
Mud flaps
Wheel chocks

ADDITIONAL OPTIONS:

Spare wheel
Spare wheel holder
Alloy wheels
Combi ramp/divided combi ramp
Aerodynamic slant 50x50 cm
Side door
Sales flap
Graphite opening window:
80x50 cm/120x54 cm/120x60 cm
Roller-blind
Aluminium blind
LED interior lighting
LED road lights

TECHNICAL PARAMETERS: DOUBLE BACK DOOR

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
F7520D h=120	750	460	290	206x114x120	323x170x170	1 axle (unbraked)	165/70 R13
F7520D h=150	750	450	300	206x114x150	323x170x200	1 axle (unbraked)	165/70 R13
F7520HD h=150	750	430	320	206x114x150	323x170x200	1 axle (braked)	165/70 R13
F752413D h=150	750	340	410	248x134x150	370x183x205	1 axle (unbraked)	165/70 R13
F752413HD h=150	750	320	430	248x134x150	370x183x205	1 axle (braked)	165/70 R13
F752415D h=150	750	330	420	248x150x150	370x205x205	1 axle (unbraked)	165/70 R13
F752415HD h=150	750	310	440	248x150x150	370x205x205	1 axle (braked)	165/70 R13
F752415D h=180	750	320	430	248x150x180	370x205x240	1 axle (unbraked)	165/70 R13
F752415HD h=180	750	300	450	248x150x180	370x205x240	1 axle (braked)	165/70 R13
F1326HD h=150	1300	810	490	262x130x150	420x183x205	1 axle (braked)	165 R13C
F1326HD h=150	1300	790	510	262x150x150	420x205x205	1 axle (braked)	165 R13C
F1326HD h=180	1300	775	525	262x150x180	420x205x240	1 axle (braked)	165 R13C
F7530D h=150	750	250	500	305x150x150	450x205x205	1 axle (unbraked)	165/70 R13
F7530HD h=150	750	230	520	305x150x150	450x205x205	1 axle (braked)	165/70 R13
F1330HD h=150	1300	730	570	305x150x150	450x205x205	1 axle (braked)	165 R13C
F2030HTD h=150	2000	1390	610	305x150x150	450x205x205	2 axles (braked)	165 R13C
F2730HTD h=150	2700	2090	610	305x150x150	450x205x205	2 axles (braked)	165 R13C
F7530D h=180	750	210	540	305x150x180	450x205x240	1 axle (unbraked)	165/70 R13
F7530HD h=180	750	190	560	305x150x180	450x205x240	1 axle (braked)	165/70 R13
F1330HD h=180	1300	690	610	305x150x180	450x205x240	1 axle (braked)	165 R13C
F2030HTD h=180	2000	1350	650	305x150x180	450x205x240	2 axles (braked)	165 R13C
F2730HTD h=180	2700	2050	650	305x150x180	450x205x240	2 axles (braked)	165 R13C
F1336HD h=180	1300	650	650	353x150x180	505x205x240	1 axle (braked)	165 R13C
F2036HTD h=180	2000	1310	690	353x150x180	505x205x240	2 axles (braked)	165 R13C
F2736HTD h=180	2700	2010	690	353x150x180	505x205x240	2 axles (braked)	165 R13C





AERODYNAMIC SLANT (option)



ALUMINIUM BLIND (option)

FOURGON – **PLYWOOD**

RAMP AT THE BACK



F1330HD Ramp

STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers (only braked models)
Plywood walls 15 mm
Anti-slip plywood floor
Cargo securing profiles on the side walls
Lashing points
Fixed supports
Back ramp
Steel/plastic mudguards
Mud flaps
Wheel chocks

ADDITIONAL OPTIONS:

Spare wheel
Spare wheel holder
Alloy wheels
Combi ramp/divided combi ramp
Aerodynamic slant 50x50 cm
Side door
Sales flap
Graphite opening window:
80x50 cm/120x54 cm/120x60 cm
Roller-blind
Aluminium blind
LED interior lighting
LED road lights

TECHNICAL PARAMETERS: RAMP AT THE BACK

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
F7520D ramp h=120	750	430	320	206x114x120	333x170x170	1 axle (unbraked)	165/70 R13
F7520D ramp h=150	750	420	330	206x114x150	333x170x200	1 axle (unbraked)	165/70 R13
F7520HD ramp h=150	750	400	350	206x114x150	333x170x200	1 axle (braked)	165/70 R13
F752413D ramp h=150	750	310	440	248x134x150	380x183x205	1 axle (unbraked)	165/70 R13
F752413HD ramp h=150	750	290	460	248x134x150	380x183x205	1 axle (braked)	165/70 R13
F752415D ramp h=150	750	300	450	248x150x150	380x205x205	1 axle (unbraked)	165/70 R13
F752415HD ramp h=150	750	280	470	248x150x150	380x205x205	1 axle (braked)	165/70 R13
F752415D ramp h=180	750	290	460	248x150x180	380x205x240	1 axle (unbraked)	165/70 R13
F752415HD ramp h=180	750	270	480	248x150x180	380x205x240	1 axle (braked)	165/70 R13
F1326HD ramp h=150	1300	780	520	262x130x150	430x183x205	1 axle (braked)	165 R13C
F1326HD ramp h=150	1300	760	540	262x150x150	430x205x205	1 axle (braked)	165 R13C
F1326HD ramp h=180	1300	710	590	262x150x180	430x205x240	1 axle (braked)	165 R13C
F7530D ramp h=150	750	220	530	305x150x150	460x205x205	1 axle (unbraked)	165/70 R13
F7530HD ramp h=150	750	200	550	305x150x150	460x205x205	1 axle (braked)	165/70 R13
F1330HD ramp h=150	1300	650	650	305x150x150	460x205x205	1 axle (braked)	165 R13C
F2030HTD ramp h=150	2000	1310	690	305x150x150	460x205x205	2 axles (braked)	165 R13C
F2730HTD ramp h=150	2700	2010	690	305x150x150	460x205x205	2 axles (braked)	165 R13C
F7530D ramp h=180	750	170	580	305x150x180	460x205x240	1 axle (unbraked)	165/70 R13
F7530HD ramp h=180	750	150	600	305x150x180	460x205x240	1 axle (braked)	165/70 R13
F1330HD ramp h=180	1300	650	650	305x150x180	460x205x240	1 axle (braked)	165 R13C
F2030HTD ramp h=180	2000	1310	690	305x150x180	460x205x240	2 axles (braked)	165 R13C
F2730HTD ramp h=180	2700	2010	690	305x150x180	460x205x240	2 axles (braked)	165 R13C
F1336HD ramp h=180	1300	610	690	353x150x180	515x205x240	1 axle (braked)	165 R13C
F2036HTD ramp h=180	2000	1270	730	353x150x180	515x205x240	2 axles (braked)	165 R13C
F2736HTD ramp h=180	2700	1970	730	353x150x180	515x205x240	2 axles (braked)	165 R13C

WINDOW 80x50 cm (option)





COMBI RAMP (option)

FOURGON FC – **PLYWOOD**

UNDERFLOOR WHEELS



FC1330HD
with side door and a window (option)





STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers (only braked models)
Plywood walls 15 mm
Anti-slip plywood floor
Cargo securing profiles on the side walls
Lashing points
Fixed supports
Double back door
Steel/plastic mudguards
Mud flaps
Wheel chocks

ADDITIONAL OPTIONS:

Spare wheel
Spare wheel holder
Alloy wheels
Combi ramp/divided combi ramp
Aerodynamic slant 50x50 cm
Side door
Sales flap
Graphite opening window:
80x50 cm/120x54 cm/120x60 cm
Roller-blind
Aluminium blind
LED interior lighting
LED road lights

TECHNICAL PARAMETERS: DOUBLE BACK DOOR

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
FC1326HD h=180	1300	710	590	260x160x180	415x175x245	1 axle (braked)	195/55 R10C
FC2026HTD h=180	2000	1370	630	260x160x180	415x175x245	2 axles (braked)	195/55 R10C
FC2726HTD h=180	2700	2070	630	260x160x180	415x175x245	2 axles (braked)	195/55 R10C
FC1330HD h= 180	1300	600	700	305x180x180	460x195x245	1 axle (braked)	195/55 R10C
FC2030HTD h= 180	2000	1260	740	305x180x180	460x195x245	2 axles (braked)	195/55 R10C
FC2730HTD h= 180	2700	1960	740	305x180x180	460x195x245	2 axles (braked)	195/55 R10C
FC1336HD h=180	1300	560	740	360x180x180	515x195x245	1 axle (braked)	195/55 R10C
FC2036HTD h=180	2000	1230	770	360x180x180	515x195x245	2 axles (braked)	195/55 R10C
FC2736HTD h=180	2700	1930	770	360x180x180	515x195x245	2 axles (braked)	195/55 R10C

FOURGON FC – **PLYWOOD**

UNDERFLOOR WHEELS



FC2036HTD ramp
with an aero slant (option)



TECHNICAL PARAMETERS: RAMP AT THE BACK

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
FC1326HD ramp h=180	1300	650	650	260x160x180	425x175x245	1 axle (braked)	195/55 R10C
FC2026HTD ramp h=180	2000	1310	690	260x160x180	425x175x245	2 axles (braked)	195/55 R10C
FC2726HTD ramp h=180	2700	2010	690	260x160x180	425x175x245	2 axles (braked)	195/55 R10C
FC1330HD ramp h=180	1300	540	760	305x180x180	470x195x245	1 axle (braked)	195/55 R10C
FC2030HTD ramp h=180	2000	1200	800	305x180x180	470x195x245	2 axles (braked)	195/55 R10C
FC2730HTD ramp h=180	2700	1900	800	305x180x180	470x195x245	2 axles (braked)	195/55 R10C
FC1336HTD ramp h=180	1300	500	800	360x180x180	525x195x245	1 axle (braked)	195/55 R10C
FC2036HTD ramp h=180	2000	1170	830	360x180x180	525x195x245	2 axles (braked)	195/55 R10C
FC2736HTD ramp h=180	2700	1870	830	360x180x180	525x195x245	2 axles (braked)	195/55 R10C

STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers (only braked models)
Plywood walls 15 mm
Anti-slip plywood floor
Cargo securing profiles on the side walls
Lashing points
Fixed supports
Back ramp
Steel/plastic mudguards
Mud flaps
Wheel chocks

ADDITIONAL OPTIONS:

Spare wheel
Spare wheel holder
Alloy wheels
Combi ramp/divided combi ramp
Aerodynamic slant 50x50 cm
Side door
Sales flap
Graphite opening window:
80x50 cm/120x54 cm/120x60 cm
Roller-blind
Aluminium blind
LED interior lighting
LED road lights

FOURGON – **SANDWICH**





F2030HT h-180

TECHNICAL PARAMETERS: DOUBLE BACK DOOR

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
F1326H h=150	1300	880	420	262x130x150	430x183x205	1 axle (braked)	165 R13C
F1326H h=150	1300	860	440	262x150x150	430x205x205	1 axle (braked)	165 R13C
F1326H h=180	1300	840	460	262x150x180	430x205x240	1 axle (braked)	165 R13C
F7530 h=150	750	290	460	305x150x150	450x205x205	1 axle (unbraked)	165/70 R13
F7530H h=150	750	270	480	305x150x150	450x205x205	1 axle (braked)	165/70 R13
F1330H h=150	1300	800	500	305x150x150	450x205x205	1 axle (braked)	165 R13C
F2030HT h=150	2000	1460	540	305x150x150	450x205x205	2 axles (braked)	165 R13C
F2730HT h=150	2700	2160	540	305x150x150	450x205x205	2 axles (braked)	165 R13C
F1330H h=180	1300	760	540	305x150x180	450x205x240	1 axle (braked)	165 R13C
F2030HT h=180	2000	1420	580	305x150x180	450x205x240	2 axles (braked)	165 R13C
F2730HT h=180	2700	2120	580	305x150x180	450x205x240	2 axles (braked)	165 R13C
F1336H h=180	1300	720	580	353x150x180	505x205x240	1 axle (braked)	165 R13C
F2036HT h=180	2000	1380	620	353x150x180	505x205x240	2 axles (braked)	165 R13C
F2736HT h=180	2700	2080	620	353x150x180	505x205x240	2 axles (braked)	165 R13C
F2741HT h=190	2700	1880	820	400x200x190	565x252x250	2 axles (braked)	165 R13C
F2750HT h=200	2700	1740	960	500x200x200	665x252x260	2 axles (braked)	165 R13C
F3060HT h=200	3000	1910	1090	600x200x200	765x252x260	2 axles (braked)	185 R14C
F3560HT h=200	3500	2400	1100	600x200x200	765x252x260	2 axles (braked)	185 R14C

STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers (only braked models)
Sandwich walls 25-33 mm
Anti-slip plywood floor
Cargo securing profiles on the side walls
Lashing points
Fixed supports
Double back door
Steel/plastic mudguards
Mud flaps
Wheel chocks

ADDITIONAL OPTIONS:

Spare wheel
Spare wheel holder
Alloy wheels
Combi ramp/divided combi ramp
Aerodynamic slant 50x50 cm
Side door
Sales flap
Graphite opening window:
80x50 cm/120x54 cm/120x60 cm
Roller-blind
Aluminium blind
LED interior lighting
LED road lights

FOURGON – **SANDWICH**

RAMP





TECHNICAL PARAMETERS: RAMP AT THE BACK

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
F1326H ramp h=150	1300	840	460	262x130x150	440x183x205	1 axle (braked)	165 R13C
F1326H ramp h=150	1300	820	480	262x150x150	440x205x205	1 axle (braked)	165 R13C
F1326H ramp h=180	1300	800	500	262x150x180	440x205x240	1 axle (braked)	165 R13C
F7530 ramp h=150	750	250	500	305x150x150	460x205x205	1 axle (unbraked)	165/70 R13
F7530H ramp h=150	750	230	520	305x150x150	460x205x205	1 axle (braked)	165/70 R13
F1330H ramp h=150	1300	760	540	305x150x150	460x205x205	1 axle (braked)	165 R13C
F2030HT ramp h=150	2000	1420	580	305x150x150	460x205x205	2 axles (braked)	165 R13C
F2730HT ramp h=150	2700	2120	580	305x150x150	460x205x205	2 axles (braked)	165 R13C
F1330H ramp h=180	1300	700	600	305x150x180	460x205x240	1 axle (braked)	165 R13C
F2030HT ramp h=180	2000	1360	640	305x150x180	460x205x240	2 axles (braked)	165 R13C
F2730HT ramp h=180	2700	2060	640	305x150x180	460x205x240	2 axles (braked)	165 R13C
F1336H ramp h=180	1300	660	640	353x150x180	515x205x240	1 axle (braked)	165 R13C
F2036HT ramp h=180	2000	1320	680	353x150x180	515x205x240	2 axles (braked)	165 R13C
F2736HT ramp h=180	2700	2020	680	353x150x180	515x205x240	2 axles (braked)	165 R13C
F2741HT ramp h=190	2700	1800	900	400x200x190	575x252x250	2 axles (braked)	165 R13C
F2750HT ramp h=200	2700	1660	1040	500x200x200	675x252x260	2 axles (braked)	165 R13C
F3060HT ramp h=200	3000	1830	1170	600x200x200	775x252x260	2 axles (braked)	185 R14C
F3560HT ramp h=200	3500	2320	1180	600x200x200	775x252x260	2 axles (braked)	185 R14C

STANDARD EQUIPMENT:

- Jockey wheel
- Shock absorbers (only braked models)
- Sandwich walls 25-33 mm
- Anti-slip plywood floor
- Cargo securing profiles on the side walls
- Lashing points
- Fixed supports
- Back ramp
- Steel/plastic mudguards
- Mud flaps
- Wheel chocks

ADDITIONAL OPTIONS:

- Spare wheel
- Spare wheel holder
- Alloy wheels
- Combi ramp/divided combi ramp
- Aerodynamic slant 50x50 cm
- Side door
- Sales flap
- Graphite opening window:
  80x50 cm/120x54 cm/120x60 cm
- Roller-blind
- Aluminium blind
- LED interior lighting
- LED road lights

FOURGON FC – **SANDWICH**





TECHNICAL PARAMETERS: DOUBLE BACK DOOR

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
FC1326H h=180	1300	740	560	260x160x180	415x175x245	1 axle (braked)	195/55 R10C
FC2026HT h=180	2000	1400	600	260x160x180	415x175x245	2 axles (braked)	195/55 R10C
FC2726HT h=180	2700	2100	600	260x160x180	415x175x245	2 axles (braked)	195/55 R10C
FC1330H h=180	1300	630	670	305x180x180	460x195x245	1 axle (braked)	195/55 R10C
FC2030HT h=180	2000	1290	710	305x180x180	460x195x245	2 axles (braked)	195/55 R10C
FC2730HT h=180	2700	1990	710	305x180x180	460x195x245	2 axles (braked)	195/55 R10C
FC1336H h=180	1300	590	710	360x180x180	515x195x245	1 axle (braked)	195/55 R10C
FC2036HT h=180	2000	1260	740	360x180x180	515x195x245	2 axles (braked)	195/55 R10C
FC2736HT h=180	2700	1960	740	360x180x180	515x195x245	2 axles (braked)	195/55 R10C
FC2740HT h=190	2700	1880	820	400x200x190	555x215x255	2 axles (braked)	195/55 R10C
FC3540HT h=190	3500	2670	830	400x200x190	555x215x255	2 axles (braked)	195/50 R13C
FC3542HT h=190	3500	2600	900	420x200x200	575x215x265	2 axles (braked)	195/50 R13C
FC2750HT h=200	2700	1660	1040	500x200x200	655x215x265	2 axles (braked)	195/55 R10C
FC3050HT h=200	3000	1960	1040	500x200x200	655x215x265	2 axles (braked)	195/55 R10C
FC3060HT h=200	3000	1750	1250	600x200x200	765x215x265	2 axles (braked)	195/55 R10C
FC3560HT h=200	3500	2240	1260	600x200x200	765x215x265	2 axles (braked)	195/50 R13C

STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers (only braked models)
Sandwich walls 25-33 mm
Anti-slip plywood floor
Cargo securing profiles on the side walls
Lashing points
Fixed supports
Double back door
Steel/plastic mudguards
Mud flaps
Wheel chocks

ADDITIONAL OPTIONS:

Spare wheel
Spare wheel holder
Alloy wheels
Combi ramp/divided combi ramp
Aerodynamic slant 50x50 cm
Side door
Sales flap
Graphite opening window:
80x50 cm/120x54 cm/120x60 cm
Roller-blind
Aluminium blind
LED interior lighting
LED road lights

FOURGON FC – **SANDWICH**



FC2736HT Ramp
with an aero slant, side door and a window (option)

TECHNICAL PARAMETERS: RAMP AT THE BACK

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
FC1326H ramp h=180	1300	700	600	260x160x180	425x175x245	1 axle (braked)	195/55 R10C
FC2026HT ramp h=180	2000	1360	640	260x160x180	425x175x245	2 axles (braked)	195/55 R10C
FC2726HT ramp h=180	2700	2060	640	260x160x180	425x175x245	2 axles (braked)	195/55 R10C
FC1330H ramp h=180	1300	590	710	305x180x180	470x195x245	1 axle (braked)	195/55 R10C
FC2030HT ramp h=180	2000	1250	750	305x180x180	470x195x245	2 axles (braked)	195/55 R10C
FC2730HT ramp h=180	2700	1950	750	305x180x180	470x195x245	2 axles (braked)	195/55 R10C
FC1336H ramp h=180	1300	550	750	360x180x180	525x195x245	1 axle (braked)	195/55 R10C
FC2036HT ramp h=180	2000	1220	780	360x180x180	525x195x245	2 axles (braked)	195/55 R10C
FC2736HT ramp h=180	2700	1920	780	360x180x180	525x195x245	2 axles (braked)	195/55 R10C
FC2740HT ramp h=190	2700	1830	870	400x200x190	565x215x255	2 axles (braked)	195/55 R10C
FC3540HT ramp h=190	3500	2620	880	400x200x190	565x215x255	2 axles (braked)	195/50 R13C
FC3542HT ramp h=200	3500	2550	950	420x200x200	585x215x265	2 axles (braked)	195/50 R13C
FC2750HT ramp h=200	2700	1610	1090	500x200x200	665x215x265	2 axles (braked)	195/55 R10C
FC3050HT ramp h=200	3000	1910	1090	500x200x200	665x215x265	2 axles (braked)	195/55 R10C
FC3060HT ramp h=200	3000	1700	1300	600x200x200	775x215x265	2 axles (braked)	195/55 R10C
FC3560HT ramp h=200	3500	2190	1310	600x200x200	775x215x265	2 axles (braked)	195/50 R13C

STANDARD EQUIPMENT:

- Jockey wheel
- Shock absorbers (only braked models)
- Sandwich walls 25-33 mm
- Anti-slip plywood floor
- Cargo securing profiles on the side walls
- Lashing points
- Fixed supports
- Back ramp
  - Steel/plastic mudguards
  - Mud flaps
  - Wheel chocks

ADDITIONAL OPTIONS:

- Spare wheel
- Spare wheel holder
- Alloy wheels
- Combi ramp/divided combi ramp
- Aerodynamic slant 50x50 cm
- Side door
- Sales flap
- Graphite opening window:
  80x50 cm/120x54 cm/120x60 cm
- Roller-blind
- Aluminium blind
- LED interior lighting
- LED road lights

FOURGON FL – **LAMINATE**



FL1331HC
with side door (option)







TECHNICAL PARAMETERS:

COMBI RAMP (can be opened both as a single door and as a ramp)

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
FL1331HC h=180	1300	725	575	310x160x180	460x201x260	1 axle (braked)	185 R14C
FL2031HTC h=180	2000	1385	615	310x160x180	460x201x260	2 axles (braked)	185 R14C
FL2731HTC h=180	2700	2085	615	310x160x180	460x201x260	2 axles (braked)	185 R14C
FL1336HC h=180	1300	615	685	360x160x180	510x201x260	1 axle (braked)	185 R14C
FL2036HTC h=180	2000	1275	725	360x160x180	510x201x260	2 axles (braked)	185 R14C
FL2736HTC h=180	2700	1975	725	360x160x180	510x201x260	2 axles (braked)	185 R14C

STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers
Sandwich walls
Laminate front wall and roof
Anti-slip plywood floor
Combi ramp (opens to the side and downwards)
Lashing points
Fixed supports
Steel mudguards
Mud flaps

ADDITIONAL OPTIONS:

Spare wheel
Spare wheel holder
Alloy wheels
LED interior lighting
LED road lights
Side door (excluding the FL2031HTC and FL2731HTC models)

FOURGON FL – **LAMINATE/ALU**









STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers
Side walls made of anodised aluminium panels
Front wall and roof made of laminate
Anti-slip plywood floor
Combi ramp (opens to the side and downwards)
Lashing points
Fixed supports
Steel mudguards
Mud flaps

ADDITIONAL OPTIONS:

Spare wheel
Spare wheel holder
Alloy wheels
LED interior lighting
LED road lights
Side door (excluding the FL2031HTC ALU and FL2731HTC ALU models)

TECHNICAL PARAMETERS: COMBI RAMP (can be opened both as a single door and as a ramp)

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
FL1331HC ALU h=180	1300	645	655	310x160x180	460x201x260	1 axle (braked)	185 R14C
FL2031HTC ALU h=180	2000	1305	695	310x160x180	460x201x260	2 axles (braked)	185 R14C
FL2731HTC ALU h=180	2700	2005	695	310x160x180	460x201x260	2 axles (braked)	185 R14C
FL1336HC ALU h=180	1300	530	770	360x160x180	510x201x260	1 axle (braked)	185 R14C
FL2036HTC ALU h=180	2000	1190	810	360x160x180	510x201x260	2 axles (braked)	185 R14C
FL2736HTC ALU h=180	2700	1890	810	360x160x180	510x201x260	2 axles (braked)	185 R14C

FOURGON – **LAMINATE** FL1334H RAMP







STANDARD EQUIPMENT:

- Jockey wheel
- Shock absorbers
- Full laminate body
- Anti-slip plywood floor
- Back ramp
- Lashing points
- Fixed supports
- Steel mudguards
- Mud flaps

ADDITIONAL OPTIONS:

- Spare wheel
- Alloy wheels
- LED interior lighting
- LED road lights

TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
FL1334H ramp	1300	790	510	340x150x180	445x205x235	1 axle (braked)	165 R13C

REFRIGERATED **TRAILER**









STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers (in braked models)
Sandwich body - 60 mm
Insulated floor
Refrigeration unit (operating range from +2°C to +10°C)
SIMOL supports
Interior lighting
Connection cable to the unit
Steel/plastic mudguards
Mud flaps
Wheel chocks

ADDITIONAL OPTIONS:

Spare wheel
Spare wheel holder
Alloy wheels
Side door
Cargo securing profiles with rubber on the side walls
Pipe and hooks (6 pcs.)
Lashing points
Aluminium sheet on the floor and 15 cm on the side walls
LED road lights

TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
FK7520	750	430	320	200x110x150	330x165x215	1 axle (unbraked)	165/70 R13
FK7520H	750	410	340	200x110x150	330x165x215	1 axle (braked)	165/70 R13
FK1325H	1300	780	520	250x150x180	420x210x245	1 axle (braked)	165 R13C
FK1330H	1300	680	620	300x165x200	455x227x265	1 axle (braked)	165 R13C
FK2030HT	2000	1320	680	300x165x200	455x227x265	2 axles (braked)	165 R13C
FK2730HT	2700	2020	680	300x165x200	455x227x265	2 axles (braked)	165 R13C
FK2036HT	2000	1180	820	360x165x200	510x225x265	2 axles (braked)	165 R13C
FK2736HT	2700	1880	820	360x165x200	510x225x265	2 axles (braked)	165 R13C
FK3536HT	3500	2660	840	360x165x200	510x225x265	2 axles (braked)	185 R14C

COMMERCIAL TRAILERS

PAGES 69 - 71









G line's interior*

TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
H75261	750	370	380	260x177x210	400x231x266	1 axle (unbraked)	165/70 R13
H75261H	750	330	420	260x177x210	400x231x266	1 axle (braked)	165/70 R13
H75261H-1300	1300	870	430	260x177x210	400x231x266	1 axle (braked)	165 R13C
H75301	750	350	400	303x177x210	445x231x266	1 axle (unbraked)	165/70 R13
H75301H	750	310	440	303x177x210	445x231x266	1 axle (braked)	165/70 R13
H75301H-1300	1300	850	450	303x177x210	445x231x266	1 axle (braked)	165/70 R13
H13251Hn	1300	760	540	250x203x230	417x216x275	1 axle (braked)	195/50 R13C
H13251HGn	1300	620	680	250x203x230	417x216x275	1 axle (braked)	195/50 R13C
H13252Hn	1300	750	550	250x203x230	417x216x275	1 axle (braked)	195/50 R13C
H13252HGn	1300	610	690	250x203x230	417x216x275	1 axle (braked)	195/50 R13C
H13301Hn	1300	690	610	300x203x230	467x216x275	1 axle (braked)	195/50 R13C
H13301HGn	1300	550	750	300x203x230	467x216x275	1 axle (braked)	195/50 R13C
H13302Hn	1300	680	620	300x203x230	467x216x275	1 axle (braked)	195/50 R13C
H13302HGn	1300	540	760	300x203x230	467x216x275	1 axle (braked)	195/50 R13C
H13361Hn	1300	660	640	360x203x230	527x216x275	1 axle (braked)	195/50 R13C
H13361HGn	1300	500	800	360x203x230	527x216x275	1 axle (braked)	195/50 R13C
H13362Hn	1300	650	650	360x203x230	527x216x275	1 axle (braked)	195/50 R13C
H13362HGn	1300	490	810	360x203x230	527x216x275	1 axle (braked)	195/50 R13C
H13421Hn	1300	560	740	420x203x230	587x216x275	1 axle (braked)	195/50 R13C
H13421HGn	1300	390	910	420x203x230	587x216x275	1 axle (braked)	195/50 R13C
H13422Hn	1300	550	750	420x203x230	587x216x275	1 axle (braked)	195/50 R13C
H13422HGn	1300	380	920	420x203x230	587x216x275	1 axle (braked)	195/50 R13C

STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers (in braked models)
Sandwich walls 33 mm
Floor with PCV lining
Conjoined drawbar and frame
Entrance door above the drawbar
Metal handle
Folded supports

ADDITIONAL OPTIONS:

Spare wheel
Sanitary corner (includes a cabinet, a double sink, a flowing water heater and a 10l tank for clean water)
Internal electrical installation 230V
Rear sales flap enlarged (to the very bottom)
Dometic roof vent 40x40 cm
Underfloor wheels (HC)

***G line models** are equipped with furniture and electrical installation



H25522HT



G line's interior*



TECHNICAL PARAMETERS:

Trailer model	Gross vehicle weight (kg)	Maximum load capacity (kg)	Unladen weight (kg)	Cargo area dimensions (cm)	Total dimiensions (cm)	Number of axles	Wheels
H20421HTn	2000	1220	780	420x203x230	587x216x275	2 axles (braked)	195/50 R13C
H20421HTGn	2000	1040	960	420x203x230	587x216x275	2 axles (braked)	195/50 R13C
H20422HTn	2000	1210	790	420x203x230	587x216x275	2 axles (braked)	195/50 R13C
H20422HTGn	2000	1030	970	420x203x230	587x216x275	2 axles (braked)	195/50 R13C
H20521HTn	2000	1120	880	520x203x230	687x216x275	2 axles (braked)	195/50 R13C
H20521HTGn	2000	930	1070	520x203x230	687x216x275	2 axles (braked)	195/50 R13C
H20522HTn	2000	1110	890	520x203x230	687x216x275	2 axles (braked)	195/50 R13C
H20522HTGn	2000	920	1080	520x203x230	687x216x275	2 axles (braked)	195/50 R13C
H25521HTn	2500	1580	920	520x203x230	687x216x275	2 axles (braked)	195/50 R13C
H25521HTGn	2500	1390	1110	520x203x230	687x216x275	2 axles (braked)	195/50 R13C
H25522HTn	2500	1570	930	520x203x230	687x216x275	2 axles (braked)	195/50 R13C
H25522HTGn	2500	1380	1120	520x203x230	687x216x275	2 axles (braked)	195/50 R13C
H20621HTn	2000	950	1050	620x203x230	785x216x275	2 axles (braked)	195/50 R13C
H20622HTn	2000	940	1060	620x203x230	785x216x275	2 axles (braked)	195/50 R13C
H27621HTn	2700	1610	1090	620x203x230	785x216x275	2 axles (braked)	195/50 R13C
H27622HTn	2700	1600	1100	620x203x230	785x216x275	2 axles (braked)	195/50 R13C

***G line models** are equipped with furniture and electrical installation

STANDARD EQUIPMENT:

Jockey wheel
Shock absorbers (in braked models)
Sandwich walls 33 mm
Floor with PCV lining
Conjoined drawbar and frame
Entrance door above the drawbar
Metal handle
Folded supports

ADDITIONAL OPTIONS:

Spare wheel
Sanitary corner (includes a cabinet, a double sink, a flowing water heater and a 10l tank for clean water)
Internal electrical installation 230V
Rear sales flap enlarged (to the very bottom)
Dometic roof vent 40x40 cm
Underfloor wheels (HC)



AUTHORISED DEALER

Where you can find us:



CONTACT

Fabryka Przyczep Niewiadów Sp. z o.o.
ul. Piaskowa 124b, 97-200 Tomaszów Mazowiecki
Tel. + 48 44 719 20 27, + 48 44 724 73 74,
e-mail: zapytania@niewiadow.pl
Taxpayer identification number: 773-245-18-00

NIEWIADÓW